

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Stafford County, Sec. 32 Twp. 21S Rge. 14 ~~(E)~~ W (W)

Location as "NE/CNW/SW" or footage from lines NE SW NE
Lease Owner Oil Properties Co., Inc.
Lease Name Neeland Well No. 1
Office Address 915 Century Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed December 9, 19 71
Application for plugging filed December 8, 19 71
Application for plugging approved December 8, 19 71
Plugging commenced December 9, 19 71
Plugging completed December 9, 19 71
Reason for abandonment of well or producing formation No Productible Zone

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

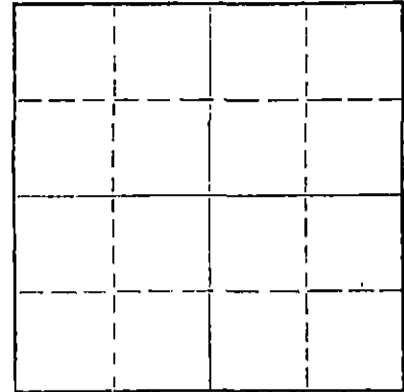

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3915 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	472	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Gunned up pits forming heavy mud. Filled hole with heavy mud. Pushed wooden plug and 1/2 sack hulls to 260 feet with 35 sacks cement through drill pipe. Filled hole with heavy mud, pushed plug to 40 feet with 10 sacks cement to base of well cellar. Job complete @ 6:00 AM 12-9-71.

RECEIVED
STATE CORPORATION COMMISSION
DEC 23 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Garvey Drilling Company
Address Box 1164, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
Ben E. Unruh (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ben E. Unruh
Box 1164, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 21st day of December 19 71

My commission expires July 8, 1974
Notary Public.

WELL LOG

COMPANY **Oil Properties Co., Inc.**

BEG. **32** T. **21S** R. **14W**

FARM **Meeland** NO. **1**


LOC. **NE SW NE**

TOTAL DEPTH **3915'**

COUNTY **Stafford, Kansas**

COMM. **12-3-71** COMP. **12-9-71**

CONTRACTOR **Carvey Drilling Company**



CASING **3 5/8" @ 471' w/325ex**

ELEVATION **1952 KB**

PRODUCTION **D & A**

FIGURES INDICATE BOTTOM OF FORMATIONS

- 255' Sand
- 335' Shale & Red Bed
- 395' Dakota Sand
- 472' Shale
- 805' Shale & Red Bed
- 908' Anhydrite
- 1320' Shale
- 1775' Shale & Lime
- 2075' Lime & Shale
- 2420' Shale & Shells
- 2770' Shale
- 3012' Lime
- 3810' Lime & Chert
- 3860' Cherty Lime
- 3915' Lime
- 3915' RZD

RECEIVED
STATE CORPORATION COMMISSION
DEC 23 1971
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas
County of Barton } SS

I, Charlene Marker of Carvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the Meeland #1 well.

Subscribed and sworn to before me this 9th day of December 1971

My Commission Expires: July 3, 1974

James A. Thomas
NOTARY PUBLIC