


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

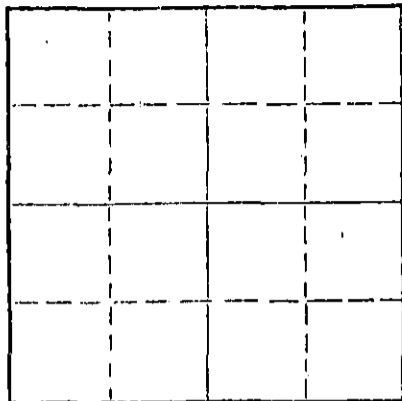

Locate well correctly on above
Section Plat

Stafford County. Sec. 32 Twp. 21 Rgs. 14 (E) W (W)
Location as "NE/CNW&SW&" or footage from lines NE NE NE
Lease Owner Spector Pipe and Supply Inc.
Lease Name Cox "C" Well No. 1
Office Address Box 169, Russell, Kans
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 11-9-51 19____
Application for plugging filed Sept. 13, 1967 19____
Application for plugging approved Sept. 14, 1967 19____
Plugging commenced October 12, 1967 19____
Plugging completed October 14, 1967 19____
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation arbuckle Depth to top 3805' Bottom 3807' Total Depth of Well 3808 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	254'	none
				5 1/2"	3807'	3010.75'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3300 feet and dumped 5 sacks of cement.
Squeezed it with 10 sacks of mud and 80 sacks of cement.

RECEIVED
OCT 23 1967
10-23-67
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Company 457
Address R.F.D. 4, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Russell, ss.
Spector Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 20th day of October, 1967.

[Signature]
Notary Public.

My commission expires May 21, 1971

15-185-12939-0000


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- PETROLEUM, INC.
Firm- Cox No. 1

SEC. 32 T. 21 R. 14.
NE NE NE

Total Depth. 3808
Comm. 10-26-51 Comp. 11-9-51
Shot or Treated.
Contractor. Garvey Oil
Issued. 1-26-52

County Stafford
KANSAS



Elevation. 1949

Production. 712 bbls. / 6% wtr.

CASING:

8 5/8" 254' cem. w/175 sx.
5 1/2" 3807'

Figures indicate Bottom of Formations.

surface soil	20
sand	225
shale & shells	325
sand	415
red bed	870
anhyd.	910
shale & shells	1235
salt	1270
salt & shale	1307
shale & shells	1665
lime & shale	2430
shale & shells	2880
lime & shale	3130
lime	3315
lime & shale	3410
lime	3600
lime & shale	3624
lime	3650
lime & shale	3709
chert	3750
shale	3782
shale & lime	5305
Arb.	3808
Total Depth	

Logs:	
Heebner	3298
Brown lime	3414
Lansing	3423
Arb.	3805

D.S.T. # 1 3500-24, open 1 hr.,
rec. 345' muddy wtr. 990# BHP
D.S.T. # 2 3540-58, open 30 mins., rec.
510' muddy oil / 60' heavily oil cut
mud, 820# BHP.
D.S.T. # 3 3610-24 open 1 hr., rec. 75'
heavily oil cut mud, 640# BHP

RECEIVED
STATE CORPORATION COMMISSION

SEP 14 1967

CONSERVATION DIVISION
Wichita, Kansas