


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

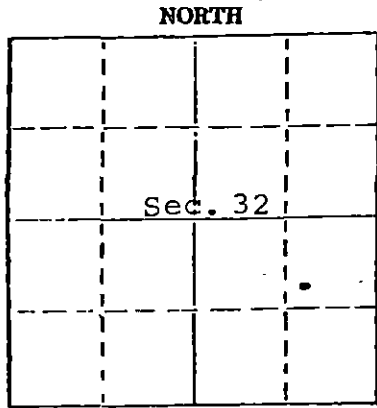

Locate well correctly on above Section Plat

STAFFORD County, Sec. 32 Twp. 21S Rge. (E) 14 (W)  
Location as "NE/CNW/SW" or footage from lines SW NE SE  
Lease Owner CHAPMAN EXPLORATION, INC., Operator  
Lease Name BAUER Well No. 7  
Office Address 404 Cities Service Bldg., Tulsa, Okla. 74119  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed April 8, 1960  
Application for plugging filed June 29, 1982  
Application for plugging approved July 6, 1982  
Plugging commenced July 27, 1982  
Plugging completed August 20, 1982  
Reason for abandonment of well or producing formation All water due to bad casing.  
If a producing well is abandoned, date of last production May 1982  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Metz  
Producing formation LKC Depth to top 3555' Bottom 3565' Total Depth of Well 3920' F--1  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil	3814'	3865'	5 1/2"	3920'	None
LKC	Oil	3555'	3565'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

CIBPs set at: 3854', 3843', 3625' over a period of years while depleting the Arbuckle. LKC perms 3555-65'. On 7/27/82, pump 50 sacks cement down surface pipe w/100 psi pumping pressure. Pump 50 sacks cement down 5 1/2" followed by 150 sacks cement mixed with 5 sacks hulls. Pump wiper plug down to 2500' with mud. On 8/20/82, cut off 5 1/2" and 8-5/8" 3' below ground and fill with ready mix concrete. Job complete.

NOTE: This well was also squeezed at 400' and 3300' to shut off Dakota leaks earlier in its life.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor SUN CEMENTERS  
Address Great Bend, Kansas

STATE OF OKLAHOMA COUNTY OF TULSA  
VIRGIL L. JOHNSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Virgil L. Johnson* (Virgil L. Johnson)  
404 Cities Service Bldg., Tulsa, OK.  
(Address) 74119

Subscribed and Sworn to before me this 24th day of August, 1982

My commission expires JUNE 7, 1984

*Marjorie J. Kiger*  
Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 26 1982

CONSERVATION DIVISION  
Wichita, Kansas