


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

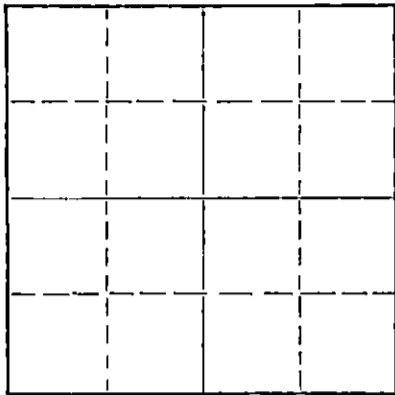

Locate well correctly on above
Section Plat

Stafford County, Sec. 7 Twp. 21 Rge. 14 (X) (W)
Location as "NE/CNW/SW" or footage from lines C N/2 S/2 SW/4
Lease Owner Honaker-Davis Drlg. Co.
Lease Name Hullman Well No. 1
Office Address 2008 Lakin, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-2 19 56
Application for plugging filed 7-2 19 56
Application for plugging approved 7-2 19 56
Plugging commenced 7-2 10:00 P.M. 19 56
Plugging completed 7-3 12:00 Mid-night 19 56
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes Phone

Name of Conservation Agent who supervised plugging of this well Mr. Brundage
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	911	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud and pushed plug with 1/3 sack hulls to 300'. Cemented with 20 sacks cement through drill pipe.

Filled hole with heavy rotary mud and pushed plug with 1/3 sack hulls to 40'. Cemented with 10 sacks cement through drill pipe. Cement to bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Honaker-Davis Drlg. Co.
Address 2008 Lakin, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Bill Edwards (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Edwards
2008 Lakin, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of July, 19 59

My commission expires 6-25-59

Lawrence D. Fisher
Notary Public.

PLUGGING
FILE SEC 7 T 21 R 14 W
BOOK PAGE 79 LINE 7

7-11-56


DRILLERS LOG

Hullman No. 1
 Loc: Cen N/2 S/2 SW/4
 Sec: 7-21S-14W
 Stafford County, Kansas
 Company: Honaker-Davis Drlg. Co., et al
 Contractor: Honaker-Davis Drlg. Co.

Comm: 6-23-56
 Comp: 7-3-56
 Rotary Total Depth: 3754
 Casing: 8-5/8" at 911

0	165	Sand & Gravel	
165	180	Clay & Shale	
180	330	Shale	
330	430	Sand	8-5/8" casing cemented at
430	902	Red Bed & Shale	911' with 450 sacks cement
902	925	Anhydrite	and 4 sacks calcium chloride
925	1025	Red Bed & Shale	
1025	1660	Shale & Shells	
1660	3754	Line & Shale	
3754		Rotary Total Depth	D & A

I certify that this is the true and correct copy of
 the above log to the best of my knowledge.


 H. S. Forbes

Subscribed and sworn to before me this 10th day of
 July, 1956.


 Kenneth G. Fischer, Notary Public

My commission expires: 6-25-59

