


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

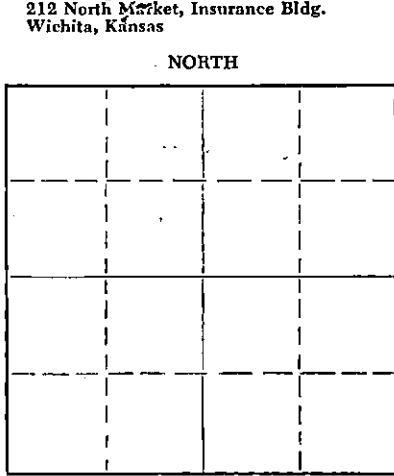

Stafford County, Sec. 9 Twp. 21 Rge. 14 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE NW Ne
Lease Owner John Jay Darrah
Lease Name Asher Well No. 1
Office Address 303 South Main, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 8 19 59
Application for plugging filed March 8 19 59
Application for plugging approved " 19 59
Plugging commenced " 19 59
Plugging completed " 19 59
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, orally

Name of Conservation Agent who supervised plugging of this well Mr. Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3631 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	set at 847'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud. Set plug at 240' cemented with 20 sacks cement, 2 sacks hulls, set second plug at 35' and cemented to bottom of cellar with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
MAR 13 1959
3-13-59
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Hellar Drilling Company, Inc.
Address 1014 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
I, D. L. Hellar (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
1014 Union Center, Wichita, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of March, 19 59
Wanda Lou Bruce
Notary Public.

My commission expires March 6, 1961

PLUGGING
FILE SEC. 9 T. 21 R. 14
BOOK PAGE 24 LINE 23

WELL LOG

OWNER: JOHN JAY DARRAH ET AL
 CONTRACTOR: HELLAR DRILLING COMPANY, INC.
 LEASE: ASHER #1
 LOCATION: SE NW NE SEC. 9-21S-14W
 STAFFORD COUNTY, KANSAS
 COMMENCED: FEBRUARY 26, 1959
 COMPLETED: MARCH 8, 1959
 CASING: 8 5/8" SET AT 847' with 400 Sacks Cement.

0	100	Sand
100	200	Shale Streaks & Sand
200	290	Shale & Sand Streaks
290	405	Sand & Shale
405	430	Red Bed
430	442	Sand
442	535	Red Bed & Sand
535	640	Red Bed
640	660	Sand
660	839	Red Bed
839	847	Anhydrite
847	1220	Anhydrite, Shale & Red Bed
1220	1880	Shale & Shells
1880	2065	Lime & Shale
2065	2139	Shale & Lime
2139	3308	Lime & Shale
3308	3350	Lime
3350	3387	Lime & Shale
3387	3400	Lansing
3400	3620	Lime
3620	3622	Shale
3622	3631	Arbuckle
	3631	Total Rotary Depth
		D & A

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 13 1959
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the ASHER #1, SE NW NE of Section 9-21S-14W, Stafford County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

BY D. L. Hellar
 President

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 10th day of March, 1959.

Wanda Lou Bruce
 Notary Public

My commission expires March 6, 1961.

PLUGGING
 FILE SEC. 9 T. 21 R. 14W
 BOOK PAGE 24 LINE 23