


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

Stafford County. Sec. 12 Twp. 21S Rge. 14W (E) (W)
Location as "NE/CNW/SW" of NE NE NW lines
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name Piel No. 7 Well No. _____
Office Address 800 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 1-19-61 19____
Application for plugging filed 1-19-61 19____
Application for plugging approved 1-19-61 19____
Plugging commenced 1-19-61 19____
Plugging completed 1-19-61 19____
Reason for abandonment of well or producing formation non-productive

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3676 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	283'	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud from total depth 3676 feet to 270 feet.
Solid plug with 25 sacks cement on top through
drill pipe - mud to 40 feet and another solid plug and
10 sacks cement to base of cellar - 2 sacks in rat hole
hole - completed at 8:00 P. M.

RECEIVED
STATE CORPORATION COMMISSION

JUL 10 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Quaker Drilling Co., Inc.
Address 800 Bitting Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Thomas M. McCaul (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Thomas M. McCaul
800 Bitting Building, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of July, 19 63

My commission expires August 10, 1965

Regina M. Murrell
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

JUL 10 1963

CONSERVATION DIVISION
Wichita, Kansas

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: 1-9-61

Contractor: Quaker Drilling Co., Inc.

Completed: 1-19-61

Piel No. 7
NE NE NW Sec. 12-21S-14W
Stafford County, Kansas

Elevation: 1918 KB
Production: D & A

Casing Record:

Set 8 5/8 inch casing at 283 feet with 275 sacks cement

(Figures Indicate the Bottom of the Formations)


<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Sand	230	Heebner	3216 -1298
Shale	285	Brown Lime	3335 -1417
Shale and Sand	400	Lansing	3341 -1425
Red Bed	806	Base of Kansas City	
Anhydrite	830		3568 -1650
Shale and Shells	1655	Viola	3581 -1663
Lime and Shale	1925	Simpson	3620 -1702
Sandy Lime and Shale	2055	Arbuckle	3670 -1752
Lime and Shale	3335	Rotary Total	
Lime	3533	Depth	3676 -1758
Cherty Lime and Shale	3615		
Lime and Shale	3676		

We hereby certify the foregoing to be a true and correct copy of the Driller's Log of the well drilled in the NE NE NW Section 12, Township 21 South, Range 14 West, Stafford County, Kansas.

QUAKER DRILLING CO., INC.

By: 

SUBSCRIBED AND SWORN to before me a Notary Public this 9th day of July, 1963.

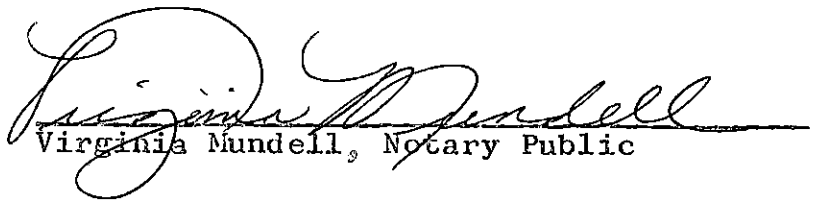
Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1965