

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 17, Twp. 21S Rge. 11 (W)

Location as "NE/CNWSW" or footage from lines C S/2 SE NE
Lease Owner Champlin Petroleum Company
Lease Name Smith "A" Well No. 3
Office Address P. O. Box 308, Ellinwood, Kansas 67526
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 7 19 69
Application for plugging filed (Verbal) September 7 19 69
Application for plugging approved (Verbal) September 7 19 69
Plugging commenced September 7 19 69
Plugging completed September 7 19 69
Reason for abandonment of well or producing formation

NORTH

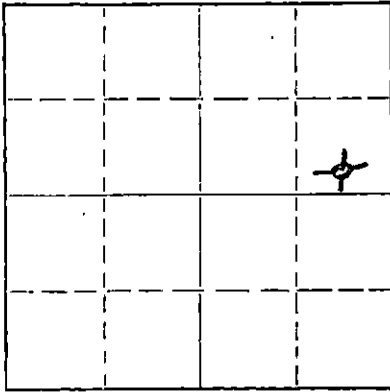

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation Depth to top Bottom Total Depth of Well 3500 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	281'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud from 3500' to 450' and pushed wood plug to 450' and pumped in 50 sacks of cement then filled hole to 275' and pumped in 25 sacks of cement then filled hole with mud to 40' and pushed wood plug and 3/4 sack of hulls to 40' and pumped in 10 sacks of cement filling hole to bottom of cellar.

Used Sun Cementing Company to furnish cement to plug this well.

RECEIVED
STATE CORPORATION COMMISSION
SEP 11 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Barton, ss.
J. W. Meyers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. W. Meyers, District Operations Manager
P. O. Box 308, Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of September, 19 69

My commission expires 5/22/70

N. Kenneth Stivers
Notary Public.

