


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

NORTH

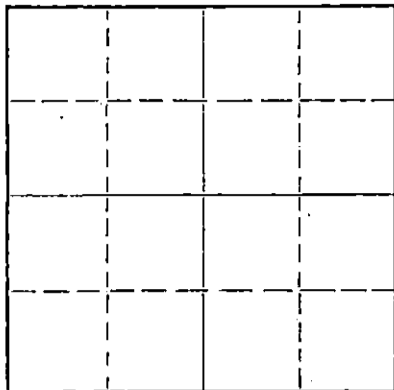

Locate well correctly on above
Section Plat

Stafford County. Sec. 17 Twp. 21 Rge. 11 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Tomlinson-Kathol, Inc.
Lease Name Keeler Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 4-18-61 19
Plugging completed 4-20-61 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot.
Producing formation Depth to top Bottom Total Depth of Well 3520 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	260'	None
				5-1/2"	3520'	3190'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3486', sanded to 3465' and dumped 5 sacks of cement @ 3465' with dump bailer. Pulled 5 1/2" casing. Bailed hole to 240', set 10' rock bridge to 230' and ran 20 sacks of cement @ 230'. Mudded hole to 30', set 10' rock bridge to 20' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

APR 27 1961

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Company
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Earl J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of April, 1961

My commission expires May 20, 1964

Milton J. Volui
Notary Public.

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

15.185.19502.0000


COPY

Company- TOMLINSON-KATHOL, INC.
Farm- Keeler No. 1

SEC. 17 T. 21 R.11W
SE SW SW

Total Depth. 3520'
Comm. 3-26-61 Comp. 4-6-61
Shot or Treated.
Contractor, Tomlinson-Kathol, Inc.
Issued. 9-2-61

County Stafford
KANSAS



Elevation. 1780' KB

Production. Dry

CASING:

8 5/8" 261' cem.w/250 sx.
5 1/2" 3520'

Figures Indicate Bottom of Formations.

sand	106
clay	240
shale	275
red bed & shale	435
shale	1042
Anhydrite	1104
shale	1570
lime & shale	1752
shale - lime strks	1860
lime & shale	1957
shale - lime	2027
shale	2360
shale - lime	2541
shale	2670
lime & shale	2807
lime, shale, chalk	2895
lime, shale	3099
shale	3188
lime	3300
lime - shale	3369
lime, Conglomerate	3437
lime, chert, shale	3470
Arbuckle	3520. RTD
Total Depth	

TOPS:

Heebner	3011
Brown Lime	3137
Lansing	3154
Conglomerate	3400
Simpson	3450
Arbuckle	3469