

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-00248-00-00
Spot: NWSESW Sec/Twnshp/Rge: 29-30S-8W
990 feet from S Section Line, 3630 feet from E Section Line
Lease Name: CARRICK "AB" Well #: 1-29
County: KINGMAN Total Vertical Depth: 4420 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 9342 E CENTRAL
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4419		100 SX
SURF	8.625	225		130 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/01/2017 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE Phone: (316) 636-2737

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: B. J. HOPE Witness Type: PARTIAL
Date/Time Plugging Completed: 10/09/2017 1:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

SET CIBP AT 4260' & CAPPED WITH 2 SKS CEMENT. CASING PARTED AT 880'. LAYED OUT CASING. RUN 2 7/8" TUBING TO 1400', RAN PERF GUN THRU TUBING TO 1430' AND SHOT 4 HOLES. PUMPED 50 SX CEMENT AT 1430'; PULLED TUBING TO 890' AND PUMPED 35 SX CEMENT. PULLED TUBING TO 275' & CIRCUALTED CEMENT TO SURFACE WITH 115 SX CEMENT.

Perfs:

Top	Bot	Thru	Comments
4308	4358		


Remarks: QUALITY WELL SERVICE. COMMON CEMENT

Plugged through: TBG

INVOICED
NOV - 9 2017

District: 02

Signed _____

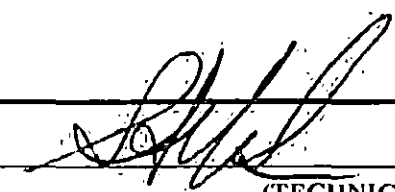

(TECHNICIAN)

1/2