


DISTRICT CONSERVATION AGENT'S REPORT



TO:

State Corporation Commission
 Conservation Division
 211 North Broadway
 Wichita, Kansas

FILE NO. 73-34LOCATION NW-NW-NESEC. 19 TWP. 21 RGE. 13 WDry Hole _____ Abandoned Oil Well Abandoned Gas Well _____


I have this date completed supervision of plugging of:

Well No. 2 Lease Hufford "B"Operator Petroleum Inc. Address 311 E. third Wichita Kans.Field _____ County StephensTotal Depth 3741 Feet.Plugging Contractor Morgan Well plugging serv.Plugging Contractor's License No. 43Address Hutchinson Kans.

(Describe briefly the manner in which the well was plugged)

Surface pipe 8 5/8" @ 367' c.w.c. 5 1/2" set 3740'
w/ 75 sq Cem. Cem. drilled out to 3724' top perf.
3692' Filled back with Chat to 3680' and
dumped 5 sq Cem. Shot off and pulled 5 1/2"
Casing. Filled hole with mud to 300' set rock
bridge and mixed and run 20 sq Cem. Mud
to 35' rock bridge and 10 sq Cem to base of cellar.

Warren H. Warner
 District Conservation Agent

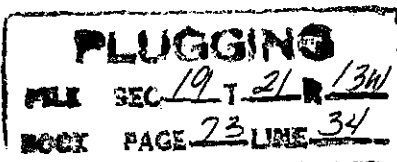Date Nov. 15, 1954

11-17-54