


DISTRICT CONSERVATION AGENT'S REPORT

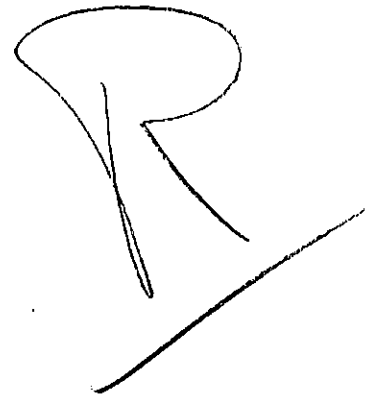

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NW-7W-18W

SEC. 19 TWP. 21 RGE. 18-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Purdock Pundsack "A"

Operator G.M. & R. Oil Co Address #204 N. Market - Wichita - Kans.

Field _____ County Stafford

Total Depth 3732 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 184 ft. Circulated with cement
5 7/8 casing set at 3721 ft. Cemented with 85 sacks of
cement - Plugged back to 3491 ft. with Chat-
Dumped 5 sacks of cement at 3491 ft. Ripped off &
pulled the 5 7/8 casing - mud to 185 ft. Set Pack
Bridge & 15 sacks of cement at 185 ft. Mud
to 36 ft. Plug & 10 sacks of cement at the
Surface.

RECEIVED
STATE CORPORATION COMMISSION
PLUGGING
JAN 30 1951
FILE SEC 1918 13W
CONSERVATION DIVISION
BOOK PAGE 52 LINE 14
Wichita, Kansas

C. D. Storch
District Conservation Agent

Date 1-25-51