

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rice County, Sec. 10 Twp. 21 Rge. 8 (E) W (W)

Location as "NE/CNW&SW" or footage from lines C NE/4

Lease Owner Sterling Drilling Company

Lease Name Engelland-Humphreys Well No. 1

Office Address Sterling, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19____

Application for plugging filed _____ 19____

Application for plugging approved _____ 19____


Plugging commenced 1-18-65 19____

Plugging completed 1-20-65 19____

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

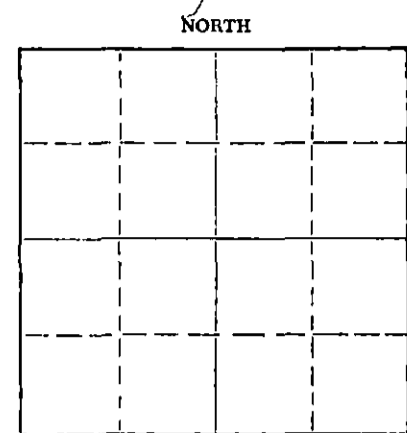

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3295 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	212'	None
				5-1/2"	3286'	2928'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3295', sanded to 3275' and dumped 5 sacks of cement @ 3275' with dump bailer. Pulled 5 1/2" casing, bailed fluid to 210', set rock bridge to 200' and dumped 20 sacks of cement @ 200'. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JAN 26 1965

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of January, 1965

My commission expires May 20, 1968 Milton J. Vliet Notary Public.

STERLING DRILLING COMPANY
Sterling, Kansas

WELL LOG ----- ENGELLAND-HUMPHREYS UNIT #1
Located: C NE, Section 10-21S-8W, Rice County, Kansas

OWNERS: Sterling Drilling Company, et al
ROTARY DRILLING CONTRACTORS: Sterling Drilling Company
CABLE TOOL CONTRACTORS: Sterling Drilling Company

COMMENCED: (r d) 9-24-57
(c t) 10-4-57

COMPLETED: (r d) 10-2-57
(c t) 10-12-57

ROTARY TOTAL DEPTH: 3295'

LOG

0 - 213 Surface Sand
213 - 900 Shale & Shells
900 - 3045 Lime & Shale
3045 - 3160 Lime
3160 - 3295 Shale & Lime T. D.

CASING RECORD

Set 8-5/8" surface casing @ 212'
with 135 sacks cement, 2% c.c.
Set 5-1/2" casing @ 3286' with
50 sacks cement.

CABLE TOOL INFORMATION: M. I. C. T. Rigged up and swabbed hole down. Acidized with 500 gallons M. C. A. by Halliburton. Acid fraced with 2500 gallons gel. Swabbed gas well in.

RECEIVED
STATE CORPORATION COMMISSION
JAN 12 1965

CONSERVATION DIVISION
Wichita, Kan.