


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

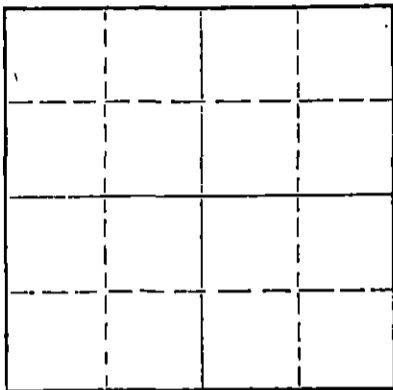

Locate well correctly on above
Section Plat

Rice County, Sec. 5 Twp. 21 Rge. 6 W(E) (W)
Location as "NE/CNWxSWx" or footage from lines C E/2 SW/4
Lease Owner Northridge Oil Co.
Lease Name Engelland Well No. I
Office Address P.O. Box 18271 Denver, Colorado
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 9-19 19 69
Application for plugging filed 10-30 19 71
Application for plugging approved 11-1 19 71
Plugging commenced 11-10 19 71
Plugging completed 11-11 19 71
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3461' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		777'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3461' to 3430'. Dumped 5 sx of cement. Mudded hole to 210'. Made 10' of rock bridge. Dumped 35 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of November, 1971

My commission expires January 5, 1974

[Signature]
Notary Public.