

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR


FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Form to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Rice County. Sec. 9 Twp. 27 Rge. (E) 7 (W)

NORTH

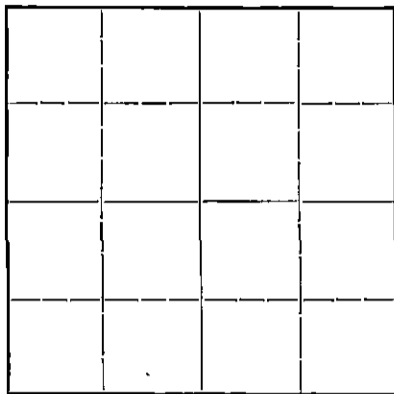

Locate well correctly on above Section Flat

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
Lease Owner The Aylward Production Company  
Lease Name Theede Well No. 8  
Office Address 813 First National Bank Bldg., Wichita, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 19...  
Application for plugging filed 19...  
Application for plugging approved 19...  
Plugging commenced January 21, 19 42  
Plugging completed January 23, 19 42  
Reason for abandonment of well or producing formation  
If a producing well is abandoned, date of last production 19...  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Ruel Durkee  
Producing formation Depth to top Bottom Total Depth of Well 3390 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Total depth 3390', 8-5/8" casing set at 3358', cemented with 250 sacks, 16" OD surface casing set at 106', cemented with 125 sacks;

Fill with mud to 3360'  
Run 8 sacks cement from 3360' to 3330'  
Filled with mud from 3330' to 150'  
Bridged solid with rock at 150'  
Run 20 sacks cement from 150' to 130'  
Filled with mud from 130' to 14'  
Cap with 6 sacks cement to cellar base  
Cement placed with Sand line and Dump bailer  
Mud used elevated from old slush pit  
Recovered 2308'10" of 8-5/8" casing  
16" casing left in hole

PLUGGING  
FILE 9-21-2W  
BOOK PAGE 14 LINE 24

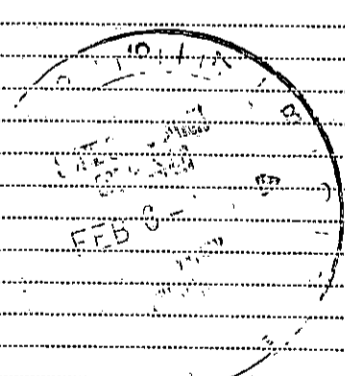

Correspondence regarding this well should be addressed to The Aylward Production Company 2-6-1942  
Address 813 First National Bank Bldg., Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
General Oil Tool Company (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) General Oil Tool Company  
By [Signature]  
309 Beacon Bldg., Wichita, Kansas. (Address)

SUBSCRIBED AND SWORN to before me this 5th day of February 1942

[Signature]  
Notary Public.

My commission expires January 19, 1943.



THEEDE WELL NO. 8

<u>Formation</u>	<u>Top</u>	<u>Bottom</u>	<u>Remarks</u>
soil and sand	0	96	
red rock and shells	96	106	Set 106' of 16" OD Surface Pipe
red rock	106	145	
red rock and gyp shells	145	185	
red rock	185	496	
shale and salt	496	825	
red rock and blue shale	825	977	
red rock and shells	977	1430	
shale and lime	1430	1526	
lime and broken shale	1526	1596	
shale lime and shells	1596	1669	
shale	1669	1774	
lime and shale	1774	1865	
lime, shale and shells	1865	1978	
shale	1978	2110	
lime and shells	2110	2201	
broken lime and shale	2201	2348	
lime and shale	2348	2422	Top of Topeka Lime 2390
lime	2422	2929	
K.O. Lime	2929	2973	
lime	2973	3232	
lime and shale	3232	3272	
broken lime	3272	3295	
shale	3295	3358	Cemented 3358' of 8-5/8 Casing 250 Slc. Cement

