

STATE CORPORATION COMMISSION
CONSERVATION DIVISION - Plugging Section
130 S. Market, Room 2078
Wichita, Kansas 67202

11-2

2-070805

API Number: 15-159-21811-0000

CW/2 W/2 NW

SECTION 12 TWP 21 RANGE 07W

OPERATOR LICENSE #31925
OPERATOR QUALITY WELL SERVICE
NAME & ADDRESS 249 BETH DRIVE
STERLING, KS 67579-9048

3960 FEET FROM S SECTION LINE
4950 FEET FROM E SECTION LINE

LEASE NAME PALLISTER 1-12L
COUNTY RICE
WELL TOTAL DEPTH 3500' 113.75
PIPE 5 1/2" @ 3495'
SURFACE CASING 8 5/8" @ 200'

ABANDONED OIL WELL GAS WELL INPUT WELL SWD D&A

OTHER WELL AS HEREINAFTER INDICATED:

PLUGGING CONTRACTOR: QUALITY WELL SERVICE

ADDRESS: STERLING, KS 67579 LICENSE: 31925

COMPANY TO PLUG AT: HOUR: 12:00 DAY: 2 MONTH: 11 YEAR: 1998

PLUGGING PROPOSAL RECEIVED FROM: JOE MASE

COMPANY NAME: QUALITY WELL SERVICE PHONE: (316) 727-3410

WERE: SAND TO 3400' AND 5 SACKS OF COMMON. 35 SACKS @ 1050'. 35 SACKS @ 650'. 250' TO 0.

PLUGGING PROPOSAL RECEIVED BY: JACK LUTHI

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL PART NONE

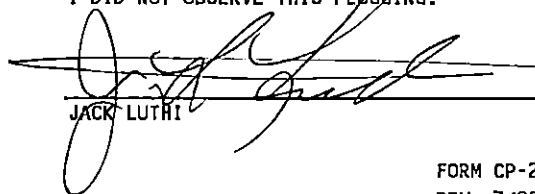
COMPLETED: HOUR: 5:00 DAY: 2 MONTH: 11 YEAR: 1998

ACTUAL PLUGGING REPORT: SANDED BOTTOM TO 3400' AND 5 SACKS OF COMMON. PULLED TO 1050'. PUMPED 35 SACKS. PULLED TO 250'. CIRCULATED CEMENT TO SURFACE.

RECEIVED
NOV 12 1998
CONSERVATION DIVISION
WICHITA, KS

REMARKS: ALLIED #7712, 60/40 POZ, 4% GEL

I DID NOT OBSERVE THIS PLUGGING.


JACK LUTHI

FORM CP-2/3
REV. 3/90

11-13-98

60345