

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

McPherson County. Sec. 33 Twp. 21S Rge. 1 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C NE NE

Lease Owner TILCO ET AL

Lease Name Lagree Well No. 1

Office Address 815 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-4 19 69

Application for plugging filed 6-4 19 69

Application for plugging approved 6-4 19 69


Plugging commenced 6-4 19 69

Plugging completed 6-4 19 69

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

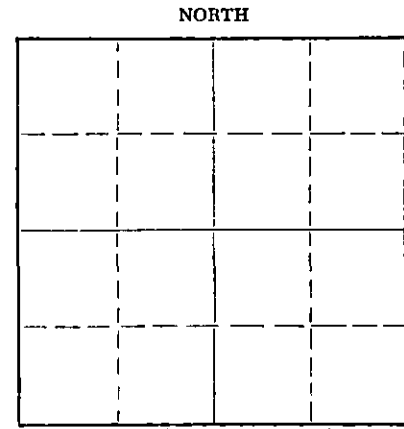

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation Depth to top Bottom Total Depth of Well 3440 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	205'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 180' with 1/2 sacks hulls, plug and 25 sacks cement,
Mud to 40' with 1/2 sacks hulls, plug and 10 sacks cement.
Rathole capped with 2 sacks cement.


RECEIVED
STATE CORPORATION COMMISSION
JUN 25 1969
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor WHITE & ELLIS DRILLING, INC. License #209
Address Box 448, El Dorado, Kansas 67042

STATE OF Kansas, COUNTY OF Butler, ss.
Ernest Sifford, employee of contractor (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford
Box 448, El Dorado, Kansas
(Address)

Subscribed and sworn to before me this 24th day of June, 19 69



L. B. Auer
Notary Public.

15.113-20067.0000

CASING RECORD

8 5/8

205' Cemented
w/150 sacks

Location: C NE NE

Section: 33-21S-1W

McPherson County, Kansas

Farm: Lagree #1

Well Owner: Tilco, et al

Contractor: WHITE & ELLIS DRILLING,
INC.

Commenced: 5-28-69

Completed: 6-4-69

T. D.

3440'

KELLY BUSHING MEASUREMENT 5' ABOVE GROUND LEVEL.

<u>FORMATION</u>	<u>DEPTH</u>
Sand	0-132
Shale	360
Anhydrite	890
Lime & Shale	1600
Shale & Lime Stks.	1680
Lime & Shale	1975
Lime w/Shale stks.	2144
Shale w/Lime stks.	2190
Shale	2297
Sand & Shale	2371
Lime	2773
Lime & Shale stks.	2883
Shale & Lime	2990
Lime	3312
Shale	3378
Lime	3417
Sand	3440

TOPS

Lansing - Kansas City	2371
Mississippi	2990
Kinderhook	3312
Hunton	3406
Simpson	3417

Dry Hole Plugged &

Abandoned

RECEIVED
 JUL 10 1969
 McPherson County, Kansas
 DEPT. OF REVENUE
 15.113-20067.0000