

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Rush County. Sec. 23 Twp. 18 Rge. 16 (E) W (W)

Location as "NE/CNW*SW*" or footage from lines SE NE SW

Lease Owner Independent Lease Management Company

Lease Name Koriel "B" Well No. 2

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 10-25-66 19

Plugging completed 10-25-66 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

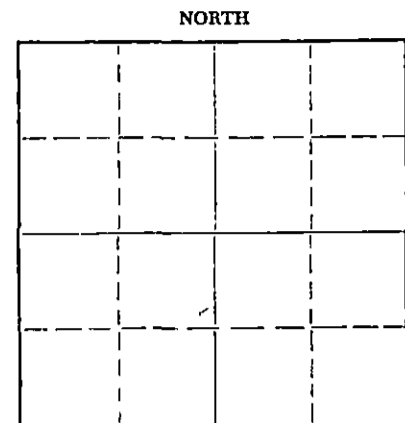

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3547 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10"	996'	None
				7"	3517'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, sanded hole to 3480' and dumped 7 sacks of cement @ 3480' with dump bailer. Set 10' rock bridge @ 300' and dumped 6 yards of ready-mix cement to cap well.

RECEIVED
STATE CORPORATION COMMISSION
11-15-66
NOV 15 1966
1966

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.

Noel J. Knight (employee of owner) or (owner/representative) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of October, 1966

Milton J. Volin Notary Public.

My commission expires May 20, 1968

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY.
 412 Union National Bank Bldg, Wichita, Kansas.


MORGAN - FLYNN OIL CO.
 Koriol No. 2-B

SEC. 23 T. 18 R. 16W.
 SE NE SW

15.165.02143.00.00

County Rush.

Total Depth. 3547
 Comm. 3-7-37 Comp. 3-24-37
 Shot or Treated
 Contractor. Herndon Drlg.
 Issued. 7-3-37



CASING.

7" 3517'

Elevation.

Production. Pot. 467 B.
 45,000,000 G.

Figures Indicate Bottom of Formations.

sand	65	broken lime	2875
shale	223	lime	3105
shale and sholls	402	broken lime & shalo	3155
sand	405	limo	3265
sand	515	broken limo	3285
red rock and sand	610	limo	3460
red rock	620	broken lime & shalo	3482
shale sticky	660	sand	3547
shalo and sholls	700		
sticky shale	730	Total Depth.	
shalo	750		
shalo and red rock	840		
red rock and shalo	925		
sticky shale and red rock	980		
anhydrite	996		
anhydrite	1005		
shale and shells	1100		
shale red	1200		
shale shells and salt	1330		
shale and shells	1555		
shale and shells	1670		
shale and shells	1690		
broken lime	1800		
broken lime	1820		
limo	1880		
brokon limo	1985		
shale and sholls	2065		
limo	2315		
broken lime	2460		
limo	2475		
broken lime	2515		
broken lime and shale	2700		
limo	2715		
brokon limo	2735		
limo	2755		
broken limo	2810		

RECEIVED
 STATE CORPORATION COMMISSION

OCT 21 1966

CONSERVATION DIVISION
 WICHITA, KANSAS