

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rice County, Sec. 15 Twp. 21 Rge. (E) 7 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW $\frac{1}{4}$ NE $\frac{1}{4}$ SW $\frac{1}{4}$

Lease Owner J. A. Aylward

Lease Name Engelland Well No. 1

Office Address 813 First Natl. Bank Bldg., Wichita, Kansas.

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed August 29, 19 38

Application for plugging filed August 2, 19 43

Application for plugging approved August 5, 19 43

Plugging commenced October 6, 19 43

Plugging completed October 13th, 19 43

Reason for abandonment of well or producing formation

Oil Exhausted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Depth to top Bottom Total Depth of Well 3388' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				16"	120'	-
				8-5/8"	3358'	2550'
				7" Liner	28'-9"	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

10 sacks cement at 3360', filled with drilling mud to 150' of top.
30 Sacks cement at 150', filled with mud to base of cellar.
10 Sacks cement at base of cellar.

10-28-43

FILE 15 21 7W
BOOK 86 15

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J. A. Aylward,
Address 813 First National Bank Building, Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

R. E. Evans (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) *R. E. Evans*

(Address)

SUBSCRIBED AND SWORN to before me this 26th day of October, 19 43

My commission expires January 19, 1947.

Alfred J. Holsby
Notary Public.



15.159.05430.0000

ENGELLAND NO. 1.

L. E. DOUGLASS OIL COMPANY

NW 1/4 NE 1/4 SW 1/4 of Section
15-21-7W, Rice Co., Kansas.

Comm. 8-14-38 Comp. 8-29-38

Elevation.
Production. Pot. 248 B.

Rotary 3357'
Cable 3388'

Casings:
16" 120'
8-5/8" ~~3357'~~ 3358'
7" 28'-9" Liner set at ~~3356'~~ 3376'

Figures Indicate Bottom of Formations.

Sand	40
sand	120
shale & shells	536
anhydrite	551
shale & salt	1010
shale & lime	1148
shale & shells	1276
shale and lime	1400
shale	1498
shale & lime	1721
lime	1738
shale	1753
lime	1850
shale	1900
lime	1943
shale & shells	1981
shale & lime	2057
lime	2210
shale	2280
lime	2305
shale	2321
lime	2725
shale & shells	2744
shale & lime	2800
lime	2808
shale & lime	2866
shale & shells	2905
Kans. City Lime	2924
lime	3155
lime soft & shale	3178
lime	3339
shale	3359
Shale "Cable Tools"	3377
conglomerate	3388

Bottom Rotary Hole

Total Depth.

Producing Formation - Conglomerate
~~Top 3357'~~ Top 3377' Bottom 3388'


15 21 7W
86 15

**MATERIAL REPORT
AND
PLUGGING RECORD**

Mail To: STATE CORPORATION COMMISSION
Conservation Division
800 Bitting Building
Wichita, Kansas

NOTICE: All questions on this form must be answered.

Company Operating J. A. AYLWARD
Office Address 813 First National Bank Bldg., Wichita, Kansas.

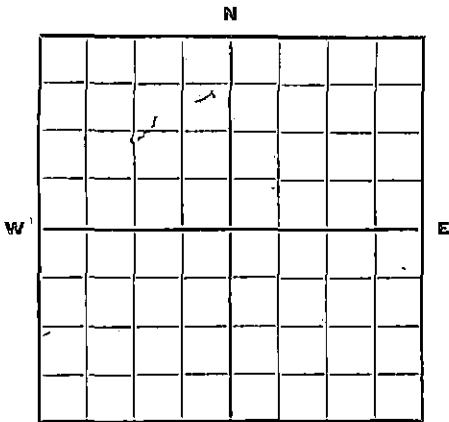

Locate well correctly.

County Rice Sec. 15 Twp. 21S Rge. 7W
Farm Name Engelland Well No. 1 Field Wherry
Well Location NW¹/₄ NE¹/₄ SW¹/₄
Name of Producing Sand Conglomerate Total Depth 3388'
Commenced Plugging October 6, 1943. Finished October 13, 1943.

DAILY AVERAGE PRODUCTION:

Initial Production: Oil..... Gas..... Water.....

Production when Plugged: Oil..... Gas..... Water.....

Estimated Total Remaining Reserves Attributable to Well at Time Abandoned.....

INFORMATION ON MATERIALS RECLAIMED FROM WELL

CASING, TUBING AND ROD DATA

Description	Size	Recovered		Junk		Reusable		Disposition Made Or To Be Made Of Usable Material
		Ft.	Tons	Ft.	Tons	Ft.	Tons	
Casing	8-5/8"	2550'	40			2550'	40	Sold for reuse
Tubing	3-3/8"	3360'	16			3360'	16	" " "
Rods	7/8"	3360'	5			3360'	5	" " "

SURFACE EQUIPMENT

Quantity	Description	*Condition	Est. Tons	Disposition Made Or To Be Made Of Reclaimed Material

* Usable, Usable with minor repairs, or junk.

Date: 10-26-43.

Signed: [Signature]
(For Operating Co.—Title)

15 21 7W
86 15

It is very important that all questions on this form be answered, as this Department has been asked by the Petroleum Administration for War to supply data on well abandonments undertaken during the war.

This information is very essential in aiding the war effort; therefore, this Department is requiring this report to be mailed within 5 days after the abandonment of your well.

19-6756

15.159.05430.0000



STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

IN REPLY PLEASE
REFER TO THIS
SUBJECT

October 15, 1943

The Aylward Production Co.
First National Bank Bldg.
Wichita, 2, Kansas

Gentlemen:

Attached hereto find material report form to be
executed by you on your #1 Engelland well,
located in the NW NE SW 15-21-7W
Rice County, Kansas.

This new form has been requested by the Federal
Government and must be mailed to this office with-
in five days after plugging has been completed.
Will you please give this matter your immediate
attention.

Very truly yours,

STATE CORPORATION COMMISSION
CONSERVATION DIVISION

ha

BY:

J. P. Roberts
J. P. Roberts H.A.

Enc