

BRIDGEPORT MACHINE COMPANY
 HAUSCHILD # 5-A

Sec. 15 T. 21 R. 7W
 County Rice


Total Depth 3393'
 Comm. 9-3-39 Comp. 9-19-39

CASING:

10" 99' 8" Elevation
 6 5/8" 3379' Production Pot. 49 Bbl. (M)

Figures Indicate Bottom of Formations

Sand	60
Red Bed	70
Shale & Shells	110
Shale & Red Rock	200
Red Rock	240
Shale & Shells	605
Salt & Shale	1015
Shells	1126
Broken Lime	1225
Lime & Shale	1260
Shale	1330
Shale & Shells	1467
Broken Lime	1570
Lime	1600
Shale	1728
Lime Sand	1732
Shale & Shells	2310
Lime	2345
Shale & Shells	2452
Lime & Shale Breaks	2516
Lime	2564
Lime & Shale Breaks	2634
Lime	2715
Broken Lime	2785
Lime	2987
Shale & Lime	3005
Lime	3260
Shale & Lime	3370
Shale	3380
Conglomerate	3393

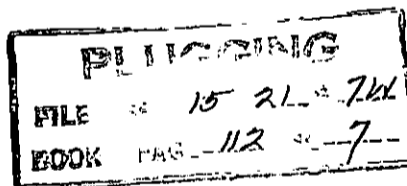

Cemented 99' 8" of 10" Casing with 100 Sacks of Incor Cement-Halliburton Method
 Cemented 3379' of 6 5/8" O.D. Casing with 110 Sacks of Incor Cement-Halliburton

