

PLUGGING
FILE SEC 14 T 21 R 3W
BOOK PAGE 78 LINE 22



ROSE SPRING DRILLING COMPANY.

J. E. Ediger Well #2
E. 60 A. SW $\frac{1}{4}$ Sec. 16-21S-3W,
McPherson County, Kansas.

Drilling commenced April 1, 1933.
Drilling completed April 23, 1933.

CASING RECORD:


12 $\frac{1}{2}$ " 185'
6 5/8" 3342'

Surface	200
Blue Shale	250
Shale & Shells	510
Gyp & Lime - shale break	620
Lime	660
Shale & Shells	699
Shells & Gyp	855
Lime & Gyp - shale breaks	935
Lime & Gyp	960
Shale	1025
Shale & Shells	1175
Shale & Lime Shells	1275
Shale & Lime Shells	1560
Hard Shale & Shells	1660
Shale	1700
Lime Broken	1720
Shale & Lime Shells	1805
Broken Lime	1835
Lime & Sticky Shale	1900
Broken Lime & Sticky Shale	1955
Lime	1990
Shale	2005
Shale & Lime Shells	2055
Broken Lime	2145
Shale	2180
Water Sand	2200
Shale	2230
Water Sand	2260
Shale & Lime Shells	2300
Shale	2335
Broken Lime	2345
Shale & Shells	2355
Lime	2400
Blue Shale	2415
Lime	2510
Shale and Sand	2560
Lime	2620
Hard Lime	2645
Lime & Sticky Shale	2675
Lime	2705
Hard Lime	2725
Lime	2750
Lime & Shale	2765
Broken Lime & Shale	2805
Lime & Sticky Shale	2825
Lime & Shale	2852
Shale	2902
Lime	2922
Shale	3015
Chat	3065
Hard Chat	3080
Chat	3085
Shale	3242
Lime	3252
Shale	3337
Viola Lime	3378
Wilcox	3429
Shale	3437
Silicious Lime	3443

T.D.

101 open hole

FILE 16 21 30
78 22

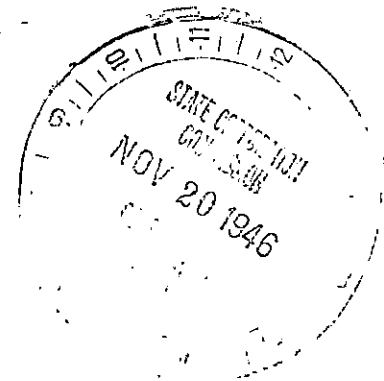

1. 1/2

2011 Budget

[Handwritten signature]

155 alva

138

20

2017

71.

$$\begin{array}{r} 285 \\ 1509 \overline{) 28500} \\ \underline{1509} \\ 13410 \\ \underline{10581} \\ 28290 \\ \underline{1509} \\ 137810 \\ \underline{10581} \\ 28290 \\ \underline{1509} \\ 137810 \end{array}$$

10/10/2019