

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-20083-00-01
Spot: N2NWSWNW Sec/Twnshp/Rge: 3-19S-2E
1485 feet from N Section Line, 330 feet from W Section Line
Lease Name: HETT BRANDT Well #: 1
County: MARION Total Vertical Depth: 3055 feet

Operator License No.: 5399
Op Name: TREK AEC, LLC
Address: 200 W DOUGLAS, SUITE 101
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2637		
SURF	8.625	154		90 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/21/2017 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: TANNER NELSON Company: _____ Phone: (620) 755-2571

Proposed
Plugging
Method:

AS PER KCC RULES & REGS

Plugging Proposal Received By: _____ WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/29/2017 1:30 PM KCC Agent: JERRY SPARLING

Actual Plugging Report:

Perfs:

SANDED OFF BOTTOM AND TOPPED 5 SX. TAGGED @ 2200'. PERFORATED @ 250'
RAN 270' OF 2 7/8" DOWN HOLE AND PUMPED 160 SX 60/40 POZMIX WITH 4 % GEL
AND CIRCUALTED TO SURFACE. PULLED TUBING. HOOKED UP TO 4 1/2"
PUMPED 10 SX 60/40 POZMIX WITH 4% GEL AND CIRCUALTED TO SURFACE
THROUGH SURFACE CASING.

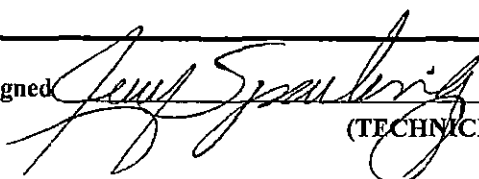
Top	Bot	Thru	Comments
2200	2440		CSG

Remarks: QUALITY WELL SERVICE CEMENT TICKET #6777

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)