

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-21142-00-00
Spot: NESENWSW Sec/Twnshp/Rge: 34-18S-2E
1666 feet from S Section Line, 4017 feet from E Section Line
Lease Name: SCULLY A Well #: 5
County: MARION Total Vertical Depth: 2932 feet

Operator License No.: 5399
Op Name: TREK AEC, LLC
Address: 200 W DOUGLAS, SUITE 101
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2929		150 SX
SURF	8.625	222		150 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/28/2017 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: TANNER NELSON Company: _____ Phone: (620) 755-2571

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: _____ WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/29/2017 11:30 AM KCC Agent: JERRY SPARLING

Actual Plugging Report:

SANDED OFF BOTTOM WITH 2800 POUNDS OF SAND AND 5 SX CEMENT THEN RAN IN WITH GRESSEL WIRE LINE AND TAGGED @ 2850'. GRESSEL WIRE LINE PERFORATED @ 250'. RAN IN WITH 8 JOINTS 2 7/8" TO 260' PUMPED 40 SX 60/40 POZMIX WITH 4% GEL AND CIRCUALTED TO SURFACE. PULLED TUBING AND TOPPED OFF WITH 10 SX CEMENT. 50 SX TOTAL.

Perfs:

Top	Bot	Thru	Comments
2850	2900	CSG	


INVOICED
JAN 30 2018

Remarks: QUALITY CEMENT TICKET #6776

Plugged through: CSG

District: 02

Signed

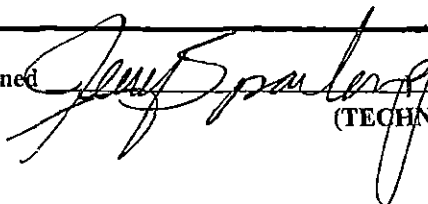

(TECHNICIAN)

✓