


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

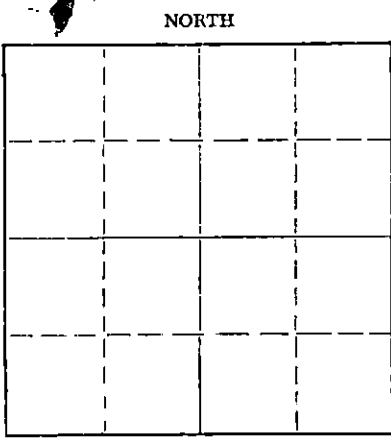

Locate well correctly on above  
Section Plat

Pawnee County, Sec. 30 Twp. 20S Rge. (E)20 (W)  
Location as "NE/CNW/SW" or footage from lines 150' NW of C NW NW  
Lease Owner Blaik Oil Company  
Lease Name Beltz Well No. 1  
Office Address 203 Park Avenue, Oklahoma City, Okla. 73102  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed Aug. 29, 1968  
Application for plugging filed (Letter 8/30/68) Aug. 29, 1968  
Application for plugging approved Aug. 29, 1968  
Plugging commenced Aug. 29, 1968  
Plugging completed Aug. 29, 1968  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4361 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	276	8-5/8	276'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 600 feet. Set first plug @ 600 feet with 70 sacks cement. Filled hole with heavy mud to 240 feet. Set second plug @ 240 feet with 20 sacks cement. Filled hole with heavy mud to 40 feet. Set third plug @ 40 feet with 10 sacks cement and 1/2 sack hulls, used pump truck. Job complete @ 12:30 P.M., Aug. 29, 1968

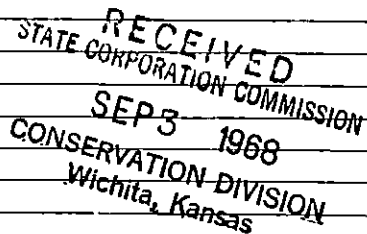

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.  
Address 830 Sutton Place - Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
E. E. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) E E Hall  
830 Sutton Place, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of August, 19 68

Barbara J. Layton  
Barbara J. Layton Notary Public.



