


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. P. Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Rice County, Sec. 28 Twp. 20 Rge. 7 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NW SE
Lease Owner Raymond Oil Company, Inc. "B"
Lease Name H. Engelland/ Well No. 1
Office Address 410 Fourth National Bank Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed May 13 19 56
Application for plugging filed December 2 19 63
Application for plugging approved December 3 19 63
Plugging commenced Dec. 9 19 63
Plugging completed Dec. 16 19 63
Reason for abandonment of well or producing formation
No longer commercially productive



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production June 29 1963
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Loman
Producing formation Cherty Conglomerate Depth to top 3340 Bottom 3342 Total Depth of Well 3342 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	227'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back 10' in the bottom with gravel and dumped 5 sacks of cement. Shot pipe off at 2917.40'. Pulled pipe and mudded hole to 200', Set rock bridge and dumped 20 sacks of cement. Finished mudding hole and dumped 10 sacks of cement at base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

DEC 18 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self
Address Rural Route #4, Hutchinson, Kansas

STATE OF Kans. COUNTY OF Reno, ss.
Employee

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Bert Self
R. R. #4, Hutchinson, Kans.

(Address)

SUBSCRIBED AND SWORN to before me this 16th day of Dec, 19 63

My commission expires October 18, 1965

Mary Self
Notary Public.

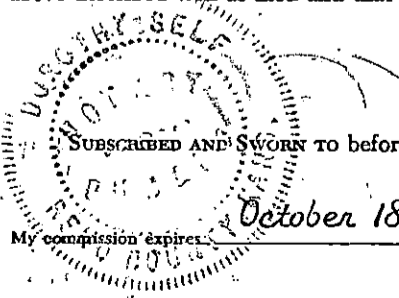

WELL LOG

15.159.04216.0000

COMPANY **Francis M. Raymond**
FARM **Hattie Engelland** NO. **1**

SEC. **28** T. **20S** R. **7W**
LOC. **NW NW SE**

TOTAL DEPTH **3342**
COMM. **4-30-56** COMP. **5-13-56**
SHOT OR TREATED
CONTRACTOR **Murfin Drilling Co.**
ISSUED

COUNTY **Rice**
KANSAS

CASING	
20	10
15	8 227' w/210 sx, cement
12	6
13	5 3341' w/60 sx, cement

ELEVATION **1648 DF**

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Tops:

35	Sandy Shale		
80	Sand		
150	Red Bed - Shells	Heebner	2720
225	Gyp - Shale - Shells	Brown Lime	2876
530	Red Bed - Shale - Gyp	LKC	2904
655	Shale - Shells		
960	Salt - Shale		
2955	Lime - Shale		
3070	Lime		
3107	Lime - Shale		
3150	Lime		
3325	Lime - Shale		
3342	Shale - Chert		
3342	RTD		

RECEIVED
STATE CORPORATION COMMISSION
DEC 5 1963
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas }
County of Sedgwick } SS:

I, W. R. Murfin of the Murfin Drilling Company
upon oath state that the above and foregoing is a true and correct copy of the log of the Hattie Engelland #1 well.

Subscribed and sworn to before me this 8th day of June 19 56.

My Commission Expires: 6-13-59

WR Murfin

Betty Spriggs

NOTARY PUBLIC