


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

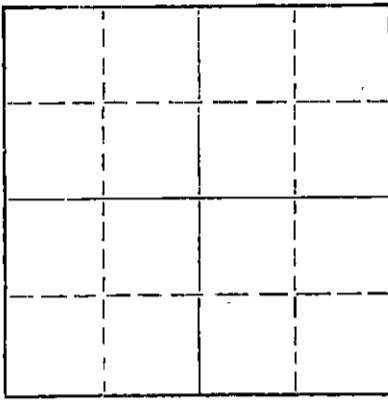

County. Sec. 29 Twp. 20 Rge. 7W (E) (W)  
Location as "NE/CNW/SE" or footage from lines SE SE SE  
Lease Owner Vernon Faulconer  
Lease Name Baker Well No. I  
Office Address 336 Union Center Bldg. Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed I-10 19 57  
Application for plugging filed Sept 19 68  
Application for plugging approved Sept 19 68  
Plugging commenced Sept 12 19 68  
Plugging completed Sept 13 19 68  
Reason for abandonment of well or producing formation Went dry

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3325' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,885'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3325' to 3290'. Dumped 5 sx of cement. Mudded hole to 210'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 23 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.  
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno, ss.  
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb  
2809 King St. Hutchinson, Kansas 67501  
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of September 19 68

My commission expires January 5, 1970

Judy Lamb  
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


COPY

Company- BENNETT & GOULD  
Farm- Baker No. 1

SEC. 29 T. 20 R. 7W  
SE SE SE

Total Depth. 3325'  
Comm. 12-30-56 Comp. 1-10-57  
Shot or Treated.  
Contractor. Salina Drlg.  
Issued. 2-18-61

County- Rice  
KANSAS.



CASINO:  
8" 210'  
5" 3303'

Elevation. 1626' RB

Production. 25 BOPD

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE

TOPS: SCOUT	
Heebner	2639
Toronto	2705
Brown Lime	2845
Lansing	2874
Base Kansas City	3208
Marmaton Chert	3275
Conglomerate	3300
Total Depth	3325

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 29 1968  
CONSERVATION DIVISION  
Wichita, Kansas