

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building,  
Wichita, Kansas


WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Rice County. Sec. 25 Twp. 20 Rge. (E) 7 (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NWC NE 1/4  
Lease Owner. Hinkle Oil Company et al.  
Lease Name. Leonard Well No. 1  
Office Address. 914 Union National Bank Bldg.,  
Character of Well (completed as Oil, Gas or Dry Hole). Dry  
Date well completed. 10-1-51 19...  
Application for plugging filed. 10-2-51 19...  
Application for plugging approved. 10-2-51 19...  
Plugging commenced. 10-1-51 19...  
Plugging completed. 10-1-51 19...  
Reason for abandonment of well or producing formation...  
If a producing well is abandoned, date of last production... 19...  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? yes

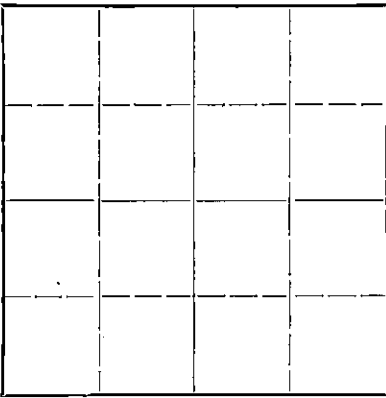

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well. Ruel Duerkee  
Producing formation. Depth to top. Bottom. Total Depth of Well. 3410 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 1/2	200'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from...feet to...feet for each plug set.

filled with mud 3410' to 200'  
Set wood plug at 200'.  
Cemented with 15 sacks cement.  
Filled with mud to 25'.  
Set plug at 25'.  
Cemented with 10 sacks cement.



(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to. Hinkle Oil Company  
Address. 914 Union National Bank Bldg. Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
J. B. Hinkle (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. B. Hinkle  
(Address)

SUBSCRIBED AND SWORN to before me this 2 day of October, 19 51

My commission expires 1-17-54  
Muir G. Lytton Notary Public.

22-237 7-47-10M  
PLUGGING  
FILE SEC 25 T 20 R 7W  
BOOK PAGE 113 LINE 28

8 1/2

Leonard No. 1. NWc NE/4 25-20-7 Rice County, Kansas.  
Casing record. Owner: Hinkle Oil Company, et al.  
1971 Contractor: J. B. Hinkle  
Commenced 9-21-51 Completed 10-1-51  
Elevation.

0	92	Surface
92	127	Red Bed
127	140	REck
140	233	Red Bed and shale
233	260	Anhydrite
260	455	Red Bed and shale
455	1140	Shale and shells
1140	1660	Lime and shale
1660	2285	Shale and shells
2285	2480	Shale and Lime
2480	2719	Lime
2719	2790	Lime and shale
2790	2886	Sand, shale and lime
2886	2937	Shale, sandy
2937	3055	Lime
3055	3190	Lime and shale
3190	3369	Lime
3369	3410	Conglomerate

Tops:

Conglomerate 3369

State of Kansas. ) 2S  
County of Sedgwick )

I hereby certify that the above is a true and correct log as compiled from the daily drilling reports kept on said well.

And Further affiant saith not.

J. B. Hinkle

Subscribed to and sworn to before me this 8th day of October, 1951.

Muriel A. Lipton

N.P.

My commission expires 1-17-54

RECEIVED  
OCT 11 1951  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC 267-20-R74  
BOOK PAGE 113 LINE 28