

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging of formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
300 Bitts Building  
Wichita, Kansas

McPherson County. Sec. 20 Twp. 20S Rge. (E) 1 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines c N/2 NW NW

Lease Owner. W. L. Hartman

Lease Name. College Well No. 1

Office Address. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole

Date well completed. October 25 19 46

Application for plugging filed. October 25 19 46

Application for plugging approved. October 25 19 46

Plugging commenced. October 25 19 46

Plugging completed. October 25 19 46

Reason for abandonment of well or producing formation.

If a producing well is abandoned, date of last production. 19

Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced?

Name of Conservation Agent who supervised plugging of this well Ruel Durkee, McPherson, Kansas

Producing formation. Depth to top. Bottom. Total Depth of Well. 3655 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	167	Cemented 100 sacks

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with 10<sup>4</sup> mud from 3655 feet to 160 feet. Put in bridge and 20 sacks of cement on bridge. Filled with 10<sup>4</sup> mud to 20 feet. Put 5 sacks of cement. Cut off surface pipe at base of collar

PLUGGING  
FILE 20-200 LW  
BOOK PAGE 28 LINE 31

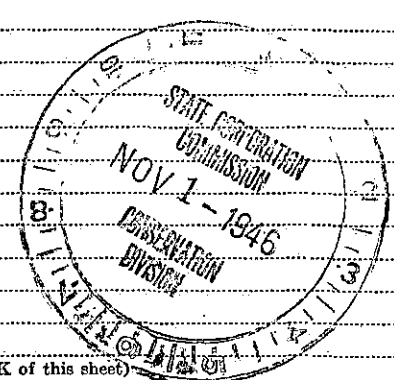

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to W. L. Hartman, P. O. Box 54, Wichita, 1, Kansas  
Address

STATE OF Kansas, COUNTY OF Montgomery, ss.  
Emmett C. Veeder

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

THE VEEDER SUPPLY & DEVELOPMENT COMPANY  
(Signature) By: Emmett C. Veeder President.  
P. O. Box 201, Cherryvale, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of October, 1946  
Llew Courad  
Notary Public.

My commission expires July 11, 1948

Drilled for: W. L. Hartman Farm: College No. 1 Depth: 2368

Contractor: The Vender Supply & Dev'l Co. Pipe: 170' of 8-5/8 Csg. Cemented with 100 sacks

Location: N/2 10W/4 10N/4 Sec. 20 Twp. 20S Rge 1W

Commenced: October 3, 1946 Completed: October 25, 1946 County: McPherson State: Kansas

Soil & Clay	0	30	30	Top chert	2982
sand	30	70	40	top Viola	3499
shale & shells	70	100	30	top simpson	3544
shale redrock	100	150	50	top arb.	3637
blue shale	150	167	17		
red bed shale & shells	167	430	263		
lime shells & shale	430	695	265		
lime sandy	695	700	5		
lime	700	800	100		
lime & shale	800	1210	410		
shale & shells	1210	1430	220		
lime	1430	1525	95		
shale & shells	1525	1685	160		
lime	1685	1750	65		
lime shale	1750	1830	80		
lime	1830	1870	40		
lime shale	1870	1900	30		
shale shells	1900	2040	140		
lime shale	2040	2055	15		
lime	2055	2130	75		
lime shale sandy	2130	2290	160		
lime shale shells	2290	2355	65		
lime	2355	2400	45		
lime shale	2400	2580	180		
lime	2580	2730	150		
lime & shale	2730	2760	30		
shale	2760	2792	32		
shale & lime	2792	2875	83		
shale	2875	2973	98		
conglomerate	2973	2984	11		
chert	2984	2995	11		
lime	2995	3245	250		
lime shale	3245	3410	165		
shale	3410	3499	89		
lime	3499	3545	46		
lime chert	3545	3585	40		
lime	3585	3600	15		
shale	3600	3639	39		
lime	3639	3655	16		

FILL PAGE 20 20 1W  
BOOK PAGE 78 LINE 31 AFFIDAVIT



STATE OF KANSAS  
MONTGOMERY COUNTY SS:

EMMETT C. VENDER, of lawful age, being duly and solemnly sworn on oath says:  
I am a resident of Cherryvale, Montgomery County, Kansas, and I hereby know and on  
oath state, that the above drilling log covering the college #1 well in Section 20,  
T. 20S, R. 1W, McPherson County, Kansas is true and correct.  
Further affiant saith not.

THE VENDER SUPPLY & DEV'L CO.

By Emmett C. Vender (Signed)  
President

Subscribed and sworn to before me this 30th day of Oct. 1946.

Cleo Conrad (Signed)  
Notary Public

My commission expires 7-11-48.