

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

McPHERSON County, Sec. 33 Twp. 20S Rge. (E) 1W (W)

Location as "NE/CNW/SW" or footage from lines C W/2 W/2 NW
NATIONAL OIL COMPANY

Lease Owner PRICE Well No. 1

Lease Name 200 West Douglas, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas Well

Date well completed 6-14-74 19

Application for plugging filed 7-21-75 19

Application for plugging approved 7-21-75 19


Plugging commenced 8-19-75 19

Plugging completed 8-22-75 19

Reason for abandonment of well or producing formation Gas Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

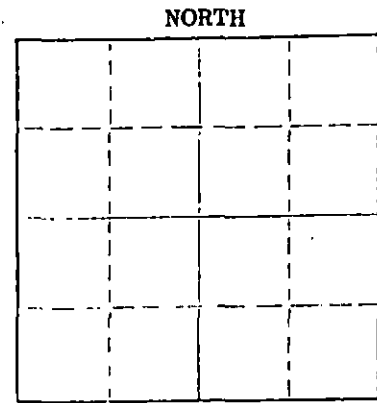

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well HUGH SCOTT

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3070 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				3 1/2	3066	740

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

SAND BACK TO 2950 FEET AND 5 SACKS OF CEMENT. SHOOT PIPE AT 1400-1100-1000-900-800-740 FEET. PLUG HOLE WITH 40 SAX AT 250 FEET AND 10 SACKS AT 40 FEET.

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) DUNBAR DRILLING INC.
Address 5252 North Broadway, Wichita, Kansas 67219

STATE OF KANSAS COUNTY OF SEDGWICK
W. P. Simmons (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. P. SIMMONS W.P. Simmons
5252 North Broadway, Wichita, Kansas 67219 (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of September, 1975

My commission expires November 19, 1977
Frances J. Simmons Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

SEP 04 1975

CONSERVATION DIVISION
Wichita, Kansas

Blackstone Drilling, Inc.

Box 455 • 523 West Kansas • Phone (316) 241-1250
McPHERSON, KANSAS 67460
June 14, 1974

COMPANY:
CONTRACTOR:
FARM:
LOCATION:
COMMENCED:
COMPLETED:
ELEVATION:

RECEIVED
STATE CORPORATION COMMISSION
SEP 10 1975
CONSERVATION DIVISION
Wichita, Kansas

NATIONAL OIL COMPANY
BLACKSTONE DRILLING, INC.
PRICE #1
C W/2 W/2 NW/4, Sec. 33-20-1,
McPherson County, Kansas
May 31, 1974
June 14, 1974

0	to	50	Shale
50	to	80	Sand
80	to	115	Blue Shale
115	to	163	Shale
163	to	540	Shale & Lime
540	to	955	Lime
955	to	1980	Shale & Lime
1980	to	2250	Lime & Shale
2250	to	2670	Shale & Lime
2670	to	2785	Lime & Shale
2785	to	2890	Shale & Lime
2890	to	2932	Lime & Shale
2932	to	2948	Shale & Lime
2948	to	3070	Mississippi
		3070	T. D.

Cut 12 1/4 inch hole to 163' and run 165' of 8 5/8 inch surface pipe, cemented with 115 sacks of cement at 163 ft., plug down at 11:00 A. M., May 31, 1974. Cut 7 7/8 inch hole to 3070 ft. Run 3076 ft. of 3" tubing, 4' off bottom at 3066', cemented with 125 sacks cement, 50/50% pozzolix, 18% salt with 12 lbs gelsonite & .75 CFR2. Plug down at 5:00 A. M., June 14, 1974.

TOPS: MISSISSIPPI - 2948'


Measurements taken from K. B.

CERTIFICATE

I, Charles D. Johnson, Secretary-Treasurer of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your PRICE #1, located on the C W/2 W/2 NW/4, Sec. 33-20-1W, McPherson County, Kansas as reflected by the files of Blackstone Drilling, Inc.


Charles D. Johnson-Secretary-Treasurer

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 14 day of June, 1974.


Johnnie L. Schmidt-Notary Public

