

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

McPHERSON County, Sec. 33 Twp. 20S Rge. 1W (E) (W)

Location as "NE/CNWKSW" or footage from lines SW SW SW

Lease Owner OILFIELD SUPPLY & TRADING INC.

Lease Name OIPE Well No. 1

Office Address 430 Greenwood, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas Well

Date well completed 3-23-73 19

Application for plugging filed 7-8-75 19

Application for plugging approved 7-8-75 19


Plugging commenced 7-17-75 19

Plugging completed 7-31-75 19

Reason for abandonment of well or producing formation Gas Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

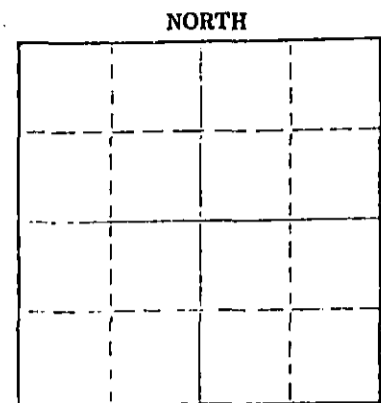

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well HUGH SCOTT

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3030 feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2	3029	1029

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

SAND BACK TO 2950 FEET AND 5 SACKS CEMENT. SHOOT PIPE AT 2624. SPOT OIL 3 HULLS, 6 SACKS GEL AND 60 BBLs. OIL. SHOOT PIPE AT 2200. SHOT WITH LOGGER AT 1029 FEET. PLUG HOLE WITH ROCK BRIDGE 245 TO 260 FEET AND 4 SACKS CEMENT, ROCK BRIDGE AT 40' AND 15 SACKS CEMENT.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor DUNBAR DRILLING INC.

Address 5252 North Broadway, Wichita, Kansas 67219

STATE OF KANSAS COUNTY OF SEDGWICK


W. P. SIMMONS (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. P. Simmons 5252 North Broadway, Wichita, Kansas 67219

SUBSCRIBED AND SWORN TO before me this 3rd day of September, 1975

My commission expires November 19, 1977 Frances J. Simmons Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

SEP 04 1975

CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

No. 1 Otte

CASING RECORD:

8-5/8" @ 204'
w/160 sx cement

5-1/2" @ 3029'
w/50 sx cement

TOTAL DEPTH: 3030'

COMPANY: Oil Field Supply & Trading

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: March 16, 1973

COMPLETED: March 23, 1973

DESCRIPTION:

SW SW SW
33-20S-1W
McPherson County,
Kansas

ELEVATION:

FORMATION

FROM

TO

REMARKS

Surface Hole
Sand & Shale
Shale
Shale & Lime
Lime
Lime & Shale
Lime
Lime & Chert

0
70
206
245
2440
2635
2730
2970

70
206
245
2440
2635
2730
2970
3030

RECEIVED
STATE CORPORATION COMMISSION

JUL 9 1975

CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda Mowrey
Linda Mowrey

Subscribed and sworn to before me this 30th day of May, 1973.

Linda S. Dickens
Notary Public

My Commission Expires:

March 8, 1977



RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1975

CONSERVATION DIVISION
Wichita, Kansas

