


STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Ness SEC. 26 TWP. 18S RGE. 26 ~~W~~
Location as in quarters or footage from lines:
660' FSL & 830' FEL of SW/4.



Locate Well
correctly on above
Section Platt.

Lease Owner Pickrell Drilling Company
Lease Name Pember 'G' Well No. 1 SWDW
Office Address 110 N. Market, Suite 205
Character of Well (Completed as Oil, Gas or Dry Hole): SWD
Date Well Completed February, 1976
Application for plugging filed March 14, 1983
Plugging commenced July 7, 1983
Plugging completed July 7, 1983
Reason for abandonment of well or producing formation Producing lease had been abandoned.
Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Not of record
Producing formation _____ Depth to top _____ bottom _____ T.D. _____
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Cherokee	Water & Oil	4433'	4436'	8 5/8"	355	None
Mississippian	Water & Oil	4479'	4610'	4 1/2"	4479	None
			(TD)			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Allied Cementing pumped 1 sx Hulls, 50 sx 50-50 poz cement (4/3), 9 sx gel-mud spacer, 160 sx 50-50 poz cement (4/3). Shut in at surface w/1800#.

(SEE ATTACHED SKETCH)

RECEIVED
STATE CORPORATION COMMISSION

4-29-85
APR 29 1985

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allied Cementing Company

STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack Gurley (employee of owner) or (~~owner or operator~~) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature)

110 N. Market, Suite 205

(Address)

Jack Gurley

SUBSCRIBED AND SWORN TO before me this

26th day of April, 19 85



My Commission expires: 6-29-88

Beth Harmon

Notary Public.

י. ט. ס. ט. ז. כ. ו. כ. א.

Oil Company _____ Well No. 1 SWD Field _____ Lease Leander C
Company Man _____ Date Drilled _____ County Ness State Kansas

7-27-82

— 355' Base $8\frac{7}{8}" W/200 S_x$

□ - 2107 Stage Collar
(Cement circ. above
stage collar)

136 fts 2 3/8" OD Plastic lined tubing.

— 4230 Baker AD Tension Packer

☒ — 4288 Baker AD Packer Chft in hole when came off previous operators fiberglass tbg

≡ 4433-4436 Chero Perfs. (Previous operator advises still open).

4479 Base 4 1/2"

Miss. Open Hole

REMARKS:

4610 TD

Date of Tally _____

No. Jts. on Location _____

Tbg. Sz. _____ Thd. _____ Wt. _____ Gr. _____

Csq. Sz. _____ Wt. _____ Gr. _____

RECEIVED
STATE CORPORATION COMMISSION

~~MAR 16 1983~~

CONSERVATION DIVISION
Wichita, Kansas




BAKER
SERVICE TOOLS

A BAKER OIL TOOLS COMPANY

☐ New Completion ☐ Workover

Oil Company _____ Well No. 1 SWDW Field _____ Lease Pember C
 Company Man _____ Date Drilled 1976 County Ness State Kansas

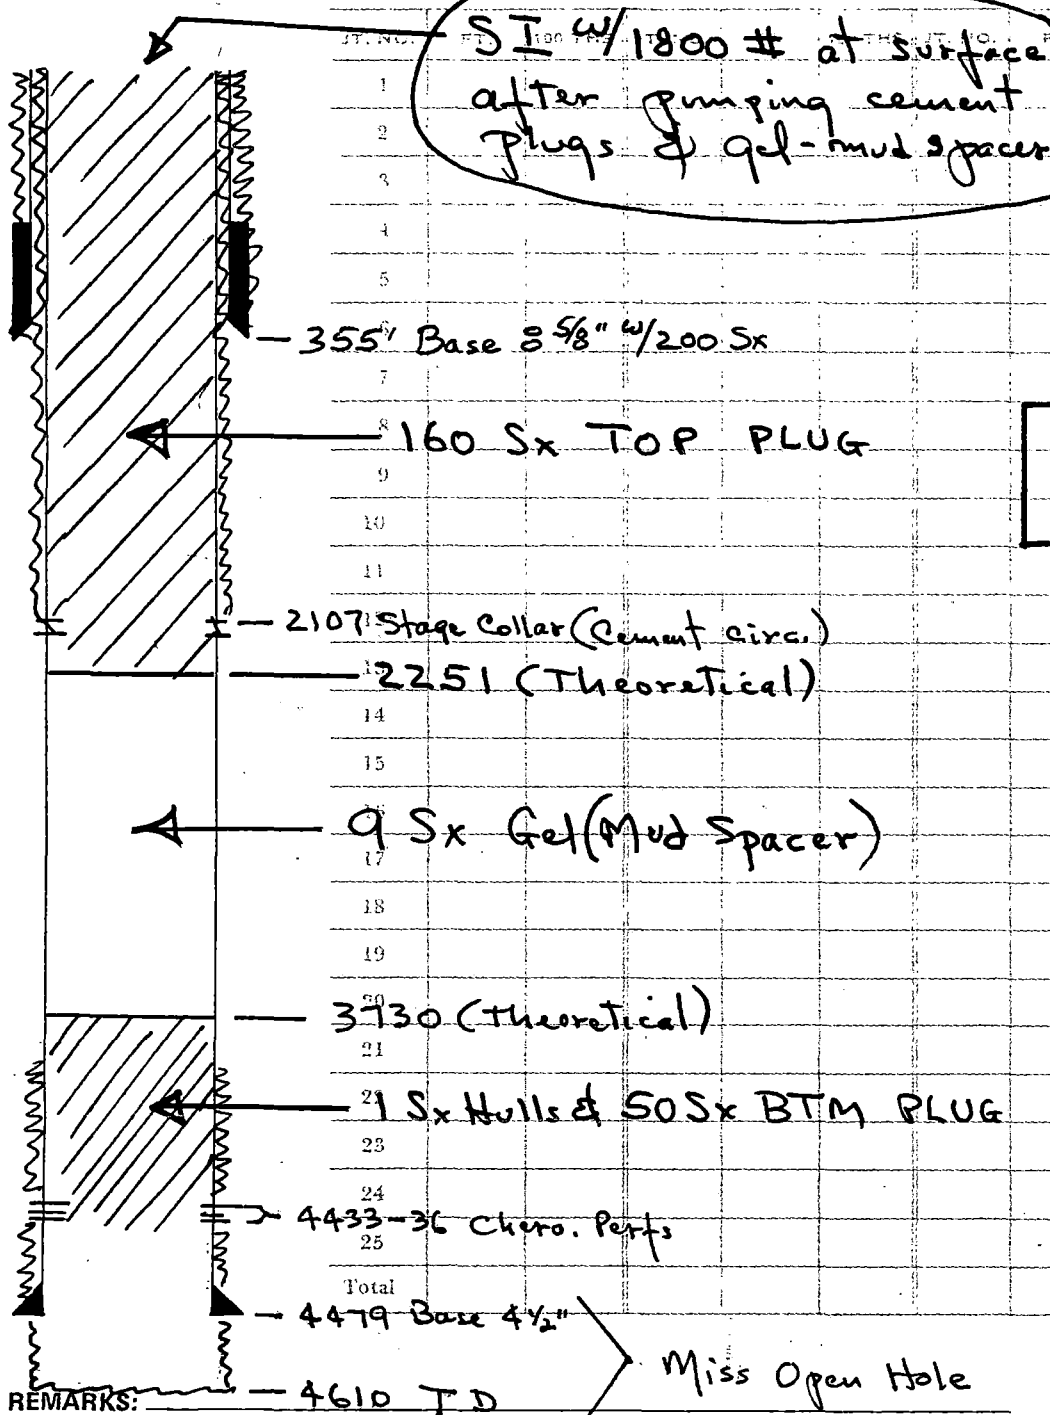

Calculated After
Plugging Conditions

RECEIVED
STATE CORPORATION COMMISSION

APR 29 1985

Totals this page _____
Average jt. lgth. this page _____

CONSERVATION DIVISION
Wichita, Kansas

Date of Tally _____

No. Jts. on Location _____

Tbg. Sz. _____ Thd. _____ Wt. _____ Gr. _____

Csg. Sz. _____ Wt. _____ Gr. _____

BAKER
SERVICE TOOLS

A DIVISION OF BAKER OIL TOOLS, INC.

15.135.21095.00.01

ALFRED CEMENTING COMPANY, INC.

P. O. BOX 31

RUSSELL, KANSAS 67665

CODE 913 483-2627

TO: Pickrell Drilling Company
Litwin Bldg. Suite 205 110 N. Market
Wichita, Ks. 67202

INVOICE NO. 34878

PURCHASE ORDER NO. _____

LEASE NAME Pember G SWDDATE July 12, 1983

SERVICE AND MATERIALS AS FOLLOWS:

Common 105 sks @ \$5.00	\$ 525.00
Poz Mix 105 sks @ \$2.10	220.50
Gel 18 sks @ \$7.25	130.50
Chloride 7 sks @ \$20.00	140.00
Hulls 1 sk @ \$14.00	14.00

\$ 1,030.00

Handling 236 sks @ \$0.90	212.40
Mileage @ \$0.66 per ton mile (75)	503.25
Plug to Abandon	340.00
Mi @ \$1.00 Pmp Trk	13.00

1,068.65

S. Tax 32.06

Total \$ 2,130.71

THANK YOU

All Prices Are Net, Payable 20th of Month Following Date of Invoice. % of 1% Charged Thereafter

RECEIVED
 STATE CORPORATION COMMISSION

APR 29 1985

CONSERVATION DIVISION
 Wichita, Kansas

Phone 913-483-2627, Russell, Kansas
Phone 316-793-5881, Great Bend, Kansas

15.135.21095.00.01

Phone Plainville 913-434-2812
Phone Kiowa 316-825-4618

ALLIED CEMENTING CO., INC.

No 35736

Home Office P. O. Box 31

Russell, Kansas 67665

010

Date	7-7-83	Sec.	26	Twp.	18	Range	26	Called Out	7:00am	On Location	10:05am	Job Start		Finish	
Lease	Pember	Well No.	#1540	Location	Ness City	13 W, 1/2 N, 1/4 S		County	Ness	State	KS				
Contractor	Picknell Kelso							Owner							
Type Job	Plug to Abandon														
Hole Size						T.D.									
Csg. Size	4 1/2					Depth									
Tbg. Size						Depth									
Drill Pipe						Depth									
Tool						Depth									
Cement Left in Csg.						Shoe Joint									
Press Max.	2000 #					Minimum									
Meas Line						Displace									
Perf.															

EQUIPMENT

Pumptrk	No	Cementer	
	105	Helper	Cyrt's Phil
Pumptrk	No	Cementer	
		Helper	
Bulktrk		Driver	Verl
Bulktrk	101	Driver	

DEPTH of Job

Reference:		
(Ness) 13	pump Trk Chg	342.00
	pump Trk mileage	13.00
	Sub Total	
	Tax	
	Total	\$ 353.00

Remarks: mixed 1 Hull, 9 Gal, 16 Gal 50/50 4-3 shut in @ 1300 #

RECEIVED
STATE CORPORATION COMMISSION

APR 29 1983

CONSERVATION DIVISION
Wichita, Kansas

To Allied Cementing Co., Inc.
You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.

Charge To Picknell Drilling Company
Street Litwin Bldg. Suite 205
City Wichita State Kansas 672
The above was done to satisfaction and supervision of owner agent or contractor.

Purchase Order No.

X Alan Tenny
CEMENT

Amount Ordered 1 Hull, 9 Gal, 210 Gal 50/50 4-3

Consisting of			
Common	10.5	5.00	52.5
Poz. Mix	10.5	2.10	22.0
Gel.	18	2.25	130.0
Chloride	7	20.00	140.0
Quickset			
Hulls-1		14.00	14.0

Sales Tax

Handling 234 @ 90¢ 212.4
Mileage 75 miles @ 66¢ 50.3
(G.B.)

Sub Total

Total \$ 1,745.00

Floating Equipment

Thank you