

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Ness ~~XXXXXX~~ County, Sec. 6 Twp. 19S Rge. 24W (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE NE

Lease Owner McClure Oil Company

Lease Name Antenen Well No. 1

Office Address 1301 Wichita Plaza Bldg., Wichita, Ks. 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-16-66 19

Application for plugging filed 6-16-66 19

Application for plugging approved 6-16-66 19


Plugging commenced 6-16-66 19

Plugging completed 6-16-66 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

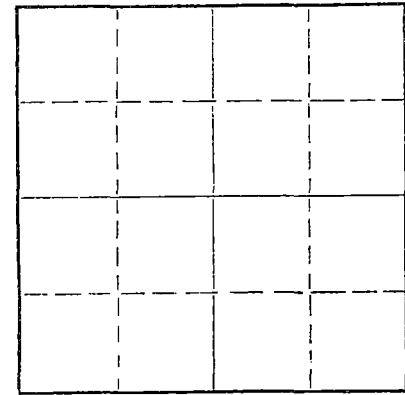

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Moreland, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4440 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	404'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded to 600, set plug w/25 sks. cement through drill pipe
Mudded to 400, 1/2 sk. hulls, plug, 20 sks. cement through drill pipe
Mudded to 40', 1/2 sk. hulls, 10 sks. cement

RECEIVED
STATE CORPORATION COMMISSION

JUN 22 1966

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.

Address P. O. Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.

Leslie Kite (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

P. O. Box 486, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 21st day of June, 1966

My commission expires April 1, 1967

Ulanda Nichols Notary Public.

DRILLER'S LOG

COMPANY: McClure Oil Company
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: ANTENEN #1
 LOCATION: C NE NE Sec. 6-19S-24W
 NESS COUNTY, KANSAS
 COMMENCED: 5-31-66
 COMPLETED: 6-16-66

0	60	Surface Clay
60	404	Shale
404	1015	Shale, Shells
1015	1027	Blaine
1027	1100	Shale
1100	1305	Sand
1305	1597	Shale, Shells
1597	1632	Shale
1632	1667	Anhydrite
1667	2080	Shale, Shells
2080	2355	Shale, Lime
2355	2915	Lime
2915	3100	Lime, Shale
3100	3250	Lime, Shale, Chalk
3250	3425	Shale, Lime
3425	3844	Lime, Shale
3844	4225	Lime
4225	4350	Lime, Shale
4350	4390	Lime, Chert
4390	4393	Chert, Lime
4393	4408	Core #1
4408	4418	Core #2
4418	4440	Lime
	<u>4440</u>	<u>RTD - D. & A.</u>

RECEIVED
 STATE CORPORATION COMMISSION

JUN 22 1966

CONSERVATION DIVISION
 STATE OF KANSAS

8 5/8" used surface casing Set @ 404' cemented with 250 sacks
 HA5 Posmix

I, Leslie Kite, do hereby certify that the above and foregoing is
 a true and correct copy of the log of the Antenen #1 well, located
 C NE NE of Section 6, Township 19 South, Range 24 West, Ness County,
 Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in
 and for Barton County, Kansas, this 21st day of June, 1966.

Ulanda Nichols
 Ulanda Nichols

My Commission Expires:
 April 1, 1967