


DISTRICT CONSERVATION AGENT'S REPORT

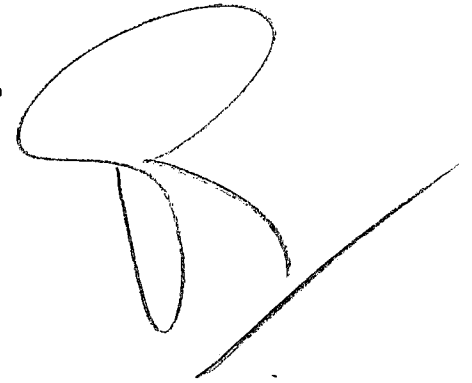

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. NE NESE

LOCATION N/4 - SE/4

SEC. 11 TWP. 20 RGE. 16-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well X

I have today completed supervision of plugging of:

Well No. 1 Lease Wichitron - "B"

Operator Campbell & Kubus Address 7415 Jackson - G. Blvd. Kans.

Field \_\_\_\_\_ County Pawnee

Total Depth 3756 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/8. 1000ft. Circulated with cement.  
4 1/2 casing set at 3756 ft. 150 sacks of cement - Plugged  
back from bottom to 3714 ft with cement.  
Shut off & killed the 4 1/2 casing - Set Rock Bridge  
& 10 sacks of cement at 850 ft - mud to 250 ft - Rock  
Bridge & 10 sacks of cement at 150 ft - mud to 30 ft  
Bridge & 10 sacks of cement at the surface.

2-29-52

**PLUGGING**  
FILE SEC 11 T. 20 R. 16W  
BOOK 147 LINE 37

C. H. Stoussch  
District Conservation Agent

Date 2-14-52

