


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

McPherson County, Sec. 2 Twp. 20 Rge. 4 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SE SW
Lease Owner Time Petroleum Company
Lease Name SW College Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 19
Application for plugging filed 12-10-62 19
Application for plugging approved 12-10-62 19
Plugging commenced 12-10-62 19
Plugging completed 12-13-62 19
Reason for abandonment of well or producing formation Depleted.



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3793 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5-1/2"		2630'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3784', sanded to 3703' and dumped 5 sacks of cement @ 3703' with dump bailer. Pulled 5 1/2" casing, set rock bridge @ 309' and dumped 4 sacks of ready-mix cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

DEC 19 1962

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of December, 1962

My commission expires May 20, 1964

Milton J. Tolin
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

15.113.00405.0000

Company- TIME PETROLEUM CO.
Farm- Southwest College No. 1

SEC. 2 T. 20 R. 4W
SE SE SW

Total Depth. 3792'
Comm. 9-10-58 Comp. 10-14-58
Shot or Treated.
Contractor. Target Drlg. & Prod. Co.
Issued. 12-20-58

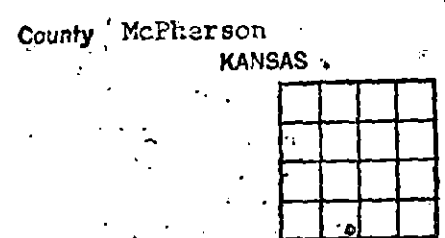

Elevation: 1479' RB

Production. 50 BOPD

CASING:

8 5/8" 575'
5" 3792'

Figures Indicate Bottom of Formations.

clay & sandy clay	105
sand & clay	230
gyp	270
sand, clay & shells	475
lime & shale	573
shale & lim shells	596
lime & shale	965
shale, red-bed shells	1180
shale & sandy shale	1485
shale & shells	1790
shale & shells	2030
lime (broken)	2170
lime - shale	2240
shale & sandy shale	2428
shale & shells	2500
shale	2529
lime	2710
lime & shale	2870
lime	2930
lime & shale	3015
shale, shells	3080
lime & shale	3188
lime (Chert)	3198
lime	3472
lime & shale	3512
shale	3719
lime	3748
shale	3754
sand	3790
shale	3792
Total Depth	

TOPS: SCOUT

Douglass Sand	2338
Kansas City	2530
Mississippi	3199
Kinderhook	3475
Misner	3718
Viola	3720
Simpson Sand	3770

RECEIVED
STATE CORPORATION COM.
DEC 20 1962
CONSERVATION DIVISION
Wichita, Kansas