

WELL PLUGGING RECORD


STATE OF KANSAS STATE CORPORATION COMMISSION

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bittling Building Wichita, Kansas

Pawnee County Sec 1 Twp 20 Rge 16 (W) Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW SW NW Lease Owner The Lotus Oil Company Lease Name Freeburg Well No 1 Office Address Box 161, Great Bend, Kansas Character of Well (completed as Oil, Gas or Dry Hole) D/A Date well completed November 21 19 51 Application for plugging filed November 21 19 51 Application for plugging approved November 21 19 51 Plugging commenced November 21 19 51 Plugging completed November 21 19 51 Reason for abandonment of well or producing formation Dry

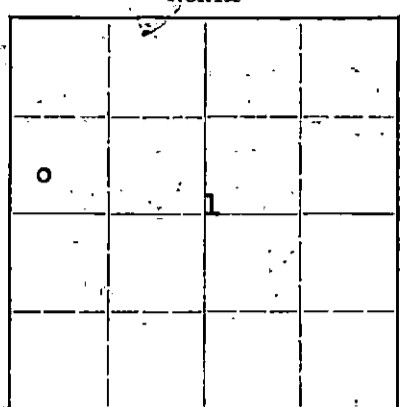

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Stough Producing formation Depth to top Bottom Total Depth of Well 3785 Feet Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Row 1: 8-5/8", 1013, None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3785' to 250' filled with heavy rotary mud, set one plug with fifteen sack of cement, then filled to 35' with heavy rotary mud; then filled with one plug and ten sacks of cement to top of hole.

Correspondence regarding this well should be addressed to The Lotus Oil Company Address P. O. Box 161, Great Bend, Kansas

STATE OF KANSAS COUNTY OF BARTON J. L. Haines (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. L. Haines Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 23 day of November 19 51

My commission expires September 21, 1953

Edwina Elder RECEIVED STATE CORPORATION COMMISSION Notary Public.

PLUGGING FILE SEC 1722 R 166 BOOK PAGE 126 LINE 26

NOV 26 1951 CONSERVATION DIVISION Wichita, Kansas

DRILLERS LOG

Operator:- The Lotus Oil Company, Kansas City, Mo.

Contractor:- Adkins Drilling Company, Great Bend, Kansas.

Lease- Freeburg No. 1- Con. SW NW NW Sec. 1-20-16W. Pawnee, County, Kansas.

Formation	From	To
Soil & Gumbo	0	40
Water Sand	40	60
Soil and Shale	60	270
Shale	270	395
Sand	395	535
Shale & Shells	535	570
Sand and Shale	570	860
Shale, Shells & Redbed	860	1003
Anhydrite	1003	1013

Set 1012 1/2 Ft. of 8 5/8" Casing cemented with 500 sacks of cement and 300 # Ca. Cl.

Cement	960	1012 1/2
Open Hole	1012 1/2	1013
Anhydrite	1013	1031
Shale & Red Bed	1031	1200
Redbed, shale & shells	1200	1535
Shale and Shells & Lime	1535	1845
Lime & Shale	1845	2360
Shale & Lime	2360	3296
Lime	3296	3661
Dolomite	3661	3785

Hole Dry and abandoned and Plugged 11-21-1951 with permanent plug placed at 250' and cemented with 15 sacks of cement, Second plug placed at 35' and cemented with 10 sacks of cement.

T. D. 3785'

I do hereby swear the foregoing is true and correct to the best of my knowledge.

PLUGGING
FILE SEC 1 T 20 R 16 W
BOOK PAGE 126 LINE 20

COMMISSION
FEB 1 X 1952
COMMUNICATIONS DIVISION
Wichita, Kansas

Subscribed and sworn to before me this 21th day of November 1951.

Pauline B. Adkins
Notary Public in and for Barton County, State of Kansas.

My Commission expires 1-26-1952