

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division,
State Corporation Commission
800 Bittling Building,
Wichita, Kansas

Strike out upper line
when reporting plug-
ging off formations.

Barton County. Sec. 28 Twp. 20 Rge. 15 (E) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NE $\frac{1}{4}$ NE $\frac{1}{4}$ SW $\frac{1}{4}$

Lease Owner Lotus Oil Company, Kansas City, Mo.

Lease Name Belt Well No. 1

Office Address 900 Land Bank Bldg., Kansas City, Mo.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed Jan. 11, 19 48

Application for plugging filed Jan. 10, 19 48

Application for plugging approved Jan. 10, 19 48

Plugging commenced Jan. 11, 19 48

Plugging completed Jan. 11, 19 48

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production none 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr

Producing formation none Depth to top --- Bottom --- Total Depth of Well 3961 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface Pipe	1015'	0	1015'	8 5/8"	1015'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from --- feet to --- feet for each plug set.

Filled hole with heavy mud from 3961' to 250', cemented with 15 sacks on top of rock bridge at 250 feet; filled with heavy mud to 15', cemented with 10 sacks on top of rock bridge at 15', cement returning to surface.

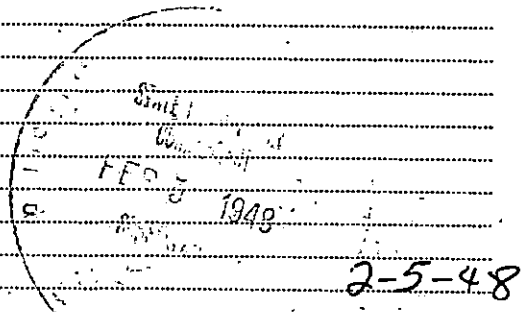

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Lotus Oil Company
Address 900 Land Bank Bldg., Kansas City, Mo.

STATE OF Kansas, COUNTY OF Barton
I, G. W. Keyes, Drilling Contractor, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Keyes
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22nd day of January, 1948

My commission expires Feb. 10, 1951.

George A. Meyer
Notary Public.

PLUGGING
FILE SEC 28 T 20 R 15
BOOK PAGE 9 LINE 20

DRILLERS LOG

The Lotus Oil Company et al, Owners - Belt No. 1
 NE/4 NE/4 SW/4, Section 28, Township 20S, Range 15 W
 Barton County, Kansas

Figures indicate bottom of formation

	0	to	135	clay and sand rock
			315	sand
			420	shale
			515	sand rock and sand
Tops			540	shale
			620	red bed
Brown lime	3455		860	red bed, shale and shells
Kansas City	3470		1005	shale and shells
Conglomerate	3751		1034	anhydrite
Arbuckle	3934		1560	shale and shells
			1735	salt and shale
			1885	shale and lime
			1910	shale and shells
Casing Record			2060	lime
8 5/8" set at 1015'			2215	broken lime
			2570	lime
			2880	shale and shells
			3075	lime
			3175	broken lime
Commenced Dec. 28, 1947			3233	lime
Completed D & A Jan. 11, 1948			3305	lime and shale
			3333	shale
			3371	lime
			3455	shale
			3470	brown lime
			3544	white lime
			3751	lime and shale
			3934	conglomerate
			3961	arbuckle

State of Kansas)
 County of Barton) SS

I, G. W. Keyes, Drilling Contractor of the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matters herein contained pertaining to the log of the above-described well, as filed, and that the same are true and correct.

G. W. Keyes

Subscribed and Sworn to before me this 22nd day of January, 1948.

George A. Meyer
 Notary Public

My commission expires Feb. 10, 1951.

PLUGGING
 FILE SEC 28-20-15W
 BOX PAGE 9-11-20