


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

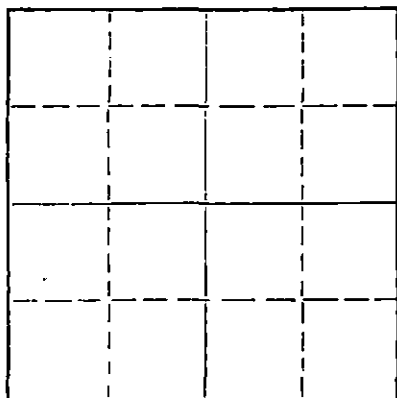

Locate well correctly on above  
Section Plat

PAWNEE County, Sec. 27, Twp. 20S Rge. (E) 16(W)

Location as "NE/CNW%SW%" or footage from lines 150' N C SE SE NE  
Lease Owner TENNECO OIL CO.  
Lease Name F. W. NELSON Well No. 1-27  
Office Address 2000 Classen Center, East Building, Oklahoma City, Okla.  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed Dry hole 19  
Application for plugging filed 8/26 19 72  
Application for plugging approved 8/26 19 72  
Plugging commenced 8/26 19 72  
Plugging completed 8/26 19 72  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well LEO MASSEY  
Producing formation Depth to top Bottom Total Depth of Well 3925 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Topsoil -surface clay, sand, shale		0	1038	8 5/8	1038	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug - 1000' w/30 sx cement  
2nd plug - 40' w/1/2 sx hulls, 15 sx cement  
Cement rathole - 15 sx

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 30 1972  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor GABBERT-JONES, INC.  
Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.  
Gabbert-Jones, Inc. (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert-Exec Vice Pres.  
830 Sutton Place, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 28 day of August, 19 72

My commission expires Nov. 29, 1975  
Marjorie Hall Notary Public.



GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 30 1972  
CONSERVATION DIVISION  
Wichita, Kansas


F. W. NELSON #1-27  
150 N C SE, SE NE Sec. 27-20S-16W  
Pawnee County, Kansas

Commenced: August 18, 1972  
Completed: August 26, 1972

OPERATOR: TENNECO OIL COMPANY

Depth		Formation	Remarks
From	To		
0	415	Surface clay-sand	Ran 26 joints of new 23# 8 5/8" csg. set @ 1038' cemented w/325 sks
415	545	Sand	
545	746	Shale-sand	Howcolite
746	1026	Shale	200 Sks Common w/3% CC
1026	1060	Anhydrite	2% Gel P.D. @ 9:45 AM 8/19/1972
1060	1865	Shale	Cement Circ.
1865	2086	Shale-lime	
2086	3298	Lime-shale	
3298	3925	Lime	
3925	TD		Dry and Abandoned


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NE NE SE, Section 27-20S-16W, Pawnee County, Kansas, to the best of my knowledge and belief.

  
James S. Sutton, II

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK )

Before me, the undersigned, a Notary Public within and for said County and State, on this 28th day of August, 1972, personally appeared James S. Sutton, II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

  
Marjorie Hall, Notary Public

My commission expires November 29, 1975

