

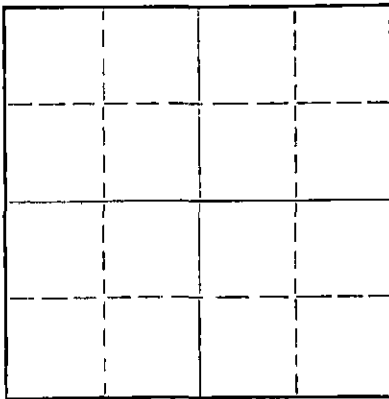
STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

Locate well correctly on above
Section Plat

Barton County, Sec. 3 Twp. 20 Rge. 15 (E) (W) X

Location as "NE/CNW/SW" or footage from lines NE NE SW

Lease Owner Woody's Quality Oil Company

Lease Name Nelly Hamm Well No. 1

Office Address 914 Cravens Building Oklahoma City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed March 5, 1964 19

Application for plugging approved March 6, 1964 19

Plugging commenced April 10, 1964 19

Plugging completed April 23, 1964 19

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan

Producing formation Depth to top Bottom Total Depth of Well 3530 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	865	None
				4 1/2	None	2909

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Cleaned out cellar.

Working pipe. Sanded to 3470'. Dumped 4 sacks of cement.

Working pipe. Shot pipe at 2900'. Pulling pipe.

Shut water in.

Cleaned threads and put on pector.

Squeezed well with 20 sacks of mud and 100 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

MAY 1 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29 day of April, 1964

My commission expires May 27, 1964

Notary Public.

DRILLER'S WELL LOG

Date Commenced: 11-8-63
 Date Completed: 11-21-63

WOODY'S QUALITY OIL COMPANY
 Nelly Hamm #1
 NE NE SW
 Sec. 3, T-20-R15 West
 Barton County, Kansas

ELEVATION: 1960 K.B.

0	-	375'	Sand-Shale
375	-	410'	Shale & Sand
410	-	500'	Dakota Sand
500	-	590'	Shale & Sand
590	-	880'	Red Bed
880	-	910'	ANHYDRITE
910	-	1050'	Red Bed
1050	-	1230'	Salt
1230	-	1725'	Shale & Shells
1725	-	2200'	Lime & Shale
2200	-	2925'	Shale Shells-Lime
2925	-	3253'	Lime
3253	-	3268'	Shale & Lime
3268	-	3280'	Lime
3280	-	3332'	Shale
3332	-	3588'	Lime
3588	-	3607'	Shale Chert
3607	-	3678'	Shale & Sand
3678	-	3715'	Dolomite

FORMATION TOPS

TOPEKA	2925'
HEEBNER	3253'
TORONTO	3268'
DOUGLAS	3280'
BROWN LIME	3332'
LANSING	3342'
CONGLOMERATE	3588'
SIMPSON SD.	3607'
ARBUCKLE	3678'

SURFACE CASING: Set: 865' of
 8-5/8" surface casing cemented
 with 450 sacks of pozmix
 cement.

PRODUCTION CASING: Set:
 3714' of new 4 1/2", 9 1/2#, J-55
 seamless casing with 135
 sacks of salt saturated poz-
 mix cement.


RECEIVED
 STATE CORPORATION COMMISSION
 MAR 13 1964

CONSERVATION DIVISION
 WICHITA, KANSAS

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 6 1964
 CONSERVATION DIVISION
 WICHITA, KANSAS


A F F I D A V I T

Merlin Giesler, of lawful age, does swear that the facts and
 statements herein contained are true and correct to the best of his
 knowledge.


 Merlin Giesler

Subscribed and sworn to before me this 5th day of March, 1964.

My Commission Expires:
 June 24, 1967


 Clair E. Stimson-NOTARY PUBLIC