


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market /
Wichita, Kansas

NORTH

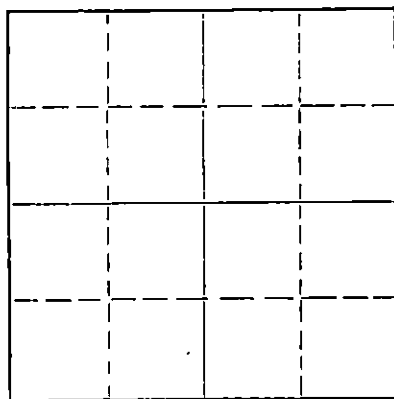

Locate well correctly on above
Section Plat

Barton County. Sec. 3 Twp. 20 Rge. 15W (~~25W~~) (W)
Location as "NE/CNW/SW" or footage from lines SW SW NW
Lease Owner Harms-Burt Drilling Company
Lease Name Fleske Well No. 1
Office Address Box 184 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil - Depleted
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ 19____
Plugging completed July 29, 1960
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3674 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	915'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand back to 3450' & 5 sacks cement with dump bailer. Pulled pipe. Mud to 300', set rock bridge, & displaced 3 yards readymix cement, cementing from 300' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
APR 7 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling Company
Address Box 221 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
William Harms (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) William Harms

SUBSCRIBED AND SWORN TO before me this 6th day of April, 1967
Helen E. Gearhart (Address)
Notary Public.

My commission expires January 22, 1970


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company. HARMS & KNIGHT DRILLING CO.
Farm. Fleske No. 1.

SEC. 3 T. 20 R. 15W
SWc NW

Total Depth. 3674
Comm. 12-14-52 Comp. 12-30-52
Shot or Treated.
Contractor.
Issued. 6-20-53

County Barton
KANSAS



CASING:
8 5/8 915' w/ 450 sx cement

Elevation. 1964
Production. 192 BO, no water

Figures indicate Bottom of Formations.

shale	61
shale & sand	100
shale & shells	330
shale	338
sand	412
shale	460
red rock	510
sand & red rock	705
red rock	903
anhydrite	915
red rock & shale	936
shale & shells	1105
shale	1885
lime	1970
shale & lime	2040
lime	2240
shale & lime	2635
shale & shells	2800
shale	2805
lime	2825
shale & lime	2925
lime	3062
lime & shale	3113
lime	3271
shale & lime	3302
shale	3329
Brown lime	3333
shale	3334
lime	3572
shale & lime, sand	3610
Conglomerate	3642
cherty conglomerate	3668
lime	3674
Total Depth	

SCOUT TOPS:	
Heebner	3245
Brown lime	3326
Lansing	3334
Base KC	3563
Cherty Conglomerate	3614
Arbuckle	3664

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1964
CONSERVATION DIVISION
Wichita, Kansas