

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Barton County, Sec. 12 Twp. 20 Rge. 15 (E) (W) x

Location as "NE/CNW&SW&" or footage from lines NW NE NW

Lease Owner Drillers-Producers Pipe & Supply

Lease Name Douglas Well No. #1

Office Address Box 368, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19 _____

Application for plugging filed 5-25-67 19 _____

Application for plugging approved _____ 19 _____


Plugging commenced 6-13-67 19 _____

Plugging completed 6-19-67 19 _____

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

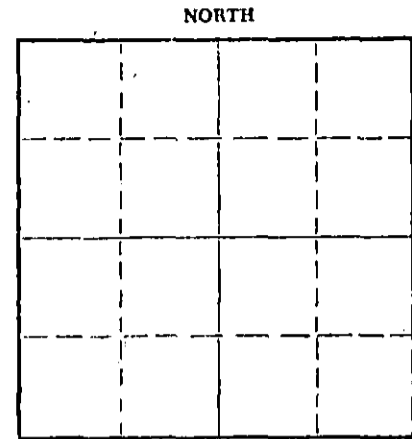

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 39.93' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3840'	2589.14'
				8 5/8"	913'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3400', mixed and ran 4 sacks cement thru dump bailer.

Mudded hole to 400', set 25' rock bridge. Filled hole with 5 yards ready-mix from 375' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JUN 21 1967

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.

Address Box 364, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.

Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer, Sec.

Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20 day of June, 19 67

My commission expires 24 October 1968

Sidney D Miller
Notary Public.

Tommy Ward Drilling Company
609 Liberty Bank Building
Oklahoma City, Oklahoma

January 31, 1963

Woody's Quality Oil
Douglas No. 1
NW NE NW Section 12-208-15W
Barton County, Kansas

Commenced - January 15, 1963
Completed - January 29, 1963
Total Depth - 3993'

Ran 3 5/8" set at 913' w/450 sacks pozmix HAS,
plug down at 3:45 p.m. 1-16-63

125 - 365'	clay shale
365 - 455'	sand
455 - 660'	shale rebed
660 - 926'	rebeds, sand shale anhydrite
926 - 955'	anhydrite
955 - 1350'	rebed salt shale
1350 - 1695'	anr shale
1695 - 2348'	lime shale
2348 - 2456'	sandy lime and shale
2456 - 3105'	lime and shale
3105 - 3350'	lime
3350 - 3648'	lime shale
3648 - 3665'	lime
3665 - 3695'	cherty lime
3695 - 3820'	lime
3820 - 3848'	dolomite lime and shale
3848 - 3993'	lime
3993'	Total Depth

RECEIVED
STATE CORPORATION COMMISSION
MAY 26 1967
CONSERVATION DIVISION
Wichita, Kansas

Ran 120 joints of 4 1/2" casing cemented w/200
sacks cement, plug down at 3:45 p.m. January 29, 1963.

I hereby certify that the above and foregoing information
is the true and correct log of the Douglas No. 1 well
as taken from the Tommy Ward Drilling Company
Daily Drilling Reports.

TOMMY WARD DRILLING COMPANY

J. Hankowsky
J. Hankowsky