

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____
LOCATION ~~7E/4~~ CM/2 SE NW
SEC. 7 TWP. 26 RGE. 15

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease J. P. Dicks
Operator Superior-Prairie Oil Co. Address Wichita-Kans
Field _____ County Barton
Total Depth 3795 Feet.


(Describe briefly the manner in which the well was plugged)

Surface Pipe 9" - 900 ft. Circulated with Cement
5/8" casing Set at 3795 ft. - Plugged back to 3750 ft
with True Wells Plug & Cement - Dumped 5
sacks cement at 3750 ft. - Shot off & Pulled 2900 ft
of 5/8" casing - Filled with mud to 900 ft. - Bridges &
20 sacks of Cement - Mud to 200 ft. - Bridges & 15 sacks
of cement - Mud to 25 ft. - Plug & 10 sacks of Cement.

Bill Morgan
Pipe Pulling - Contractor

E. M. Stough
District Conservation Agent

Date 6 - 18 - 48

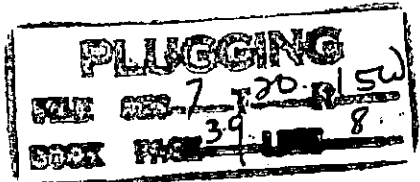

6-23-1948