


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

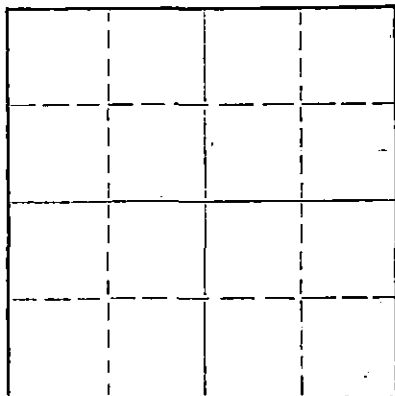

Locate well correctly on above
Section Plat

Barton County. Sec. 20 Twp. 20 Rge. 15 (X) (W)
Location as "NE/CNW%SW%" or footage from lines NW NE SW
Lease Owner H.C. Bennett
Lease Name Converse Well No. 1
Office Address 1212 Union Nat'l Bldg. Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed 9-9-53 19
Application for plugging filed 3-10-67 19
Application for plugging approved 3-13-67 19
Plugging commenced 3-22-67 19
Plugging completed 3-25-67 19
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3889 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1083	none
				5 1/2	3835'	3440'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole with sand from 3889 to 3850' and dump 5 sacks of cement

Set 20' rock bridge from 350' to 330' and dump 5 yards of ready mix concrete to surface

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Flint Engineering and Const. Co.
Address 2375 W. Central El Dorado, Ks.

STATE OF Kansas, COUNTY OF Butler, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]

(Address)

SUBSCRIBED AND SWORN TO before me this 28 day of March, 19 67

My commission expires Sept. 27, 1967

Ronald P. [Signature]
RECEIVED
STATE CORPORATION COMMISSION
Notary Public.

MAR 31 1967

CONSERVATION DIVISION
Wichita, Kansas

15-009.16474-0000


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

STICKLE DRILLING CO. &
Company - SUNRAY OIL CO.
Farm - Converse No. 1

SEC. 27. 20 R.15W
NW NE SE

Total Depth. 3889
Comm. 7-31-53 Comp. 9-9-53
Shot or Treated.
Contractor. Adkins Drilling Co., Inc.
Issued. 10-3-53

County Barton
KANSAS



CASING:
8 5/8 @ 1083' w/ 475 sx cem.
5 1/2 @ 3835 w/ 75 sx cem.

elevation. 2072
Production. 3,750,000 Gas

Figures in feet. Depth of Penetration.

clay & sand	185
shale & sand	345
sand	415
shale & sand	483
sand & red bed	608
shale & red bed	669
red bed, sand & shale	1069
anhydrite	1083
plug & cement	1083
anhydrite	1097
shale	1515
shale & salt	1870
lime & shale	2445
shale	2955
shale & lime	3492
lime	3779
dolomite	3789
cored	3836
dolomite	3889
Total Depth	
SCOUT TOPS:	
Lansing	3492
Arbuckle	3779

RECEIVED
STATE CORPORATION COMMISSION
MAR 13 1967
CONSERVATION DIVISION
Wichita, Kansas