

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

15W NORTH

20S

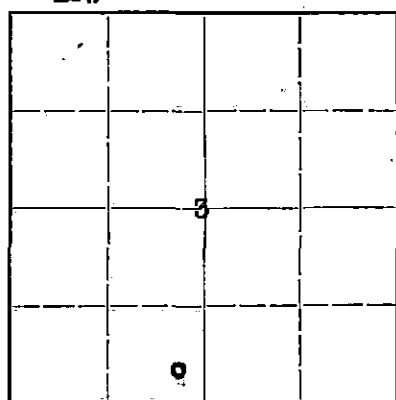

Locate well correctly on above
Section Plat

Barton County. Sec. 3 Twp. 20S Rge. (E) 15 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE SE SW
Lease Owner. ~~Margaret J. Cameron~~ Stanolind Oil & Gas Co.
Lease Name. Margaret J. Cameron Well No. 1
Office Address. P.O. Box 591, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole). Dry hole
Date well completed. June 18, 1945 19
Application for plugging filed. Written June 21, 1945. Verbal, 6-20-45 19
Application for plugging approved. Verbal, 6-20-45 19
Plugging commenced. June 20, 1945 19
Plugging completed. June 20, 1945 19
Reason for abandonment of well or producing formation. Non-producing

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. H.W. Kerr
Producing formation. Arbuckle Depth to top. 3679 Bottom. 3733 Total Depth of Well. 3733 Feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lansing	No show	Top 3360		13-3/8"	129'2"	None
Arbuckle	No. show	3679	3733	8-5/8"	968'7"	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped in heavy mud from TD 3733 to 400 ft. Wood plug from 398 to 400 ft. Pumped in 15 sacks cement from 398 to 392 ft. Heavy mud from 392 to 20 ft. Wood plug from 20 to 18 ft. Capped with 15 sacks of cement from 18 ft. flush with bottom of cellar. Surface pipe was welded shut on top.

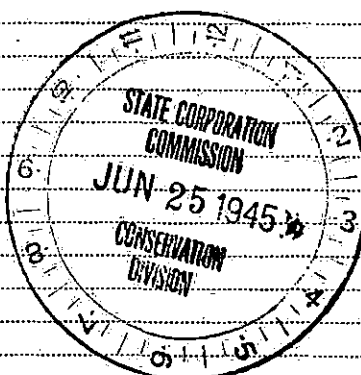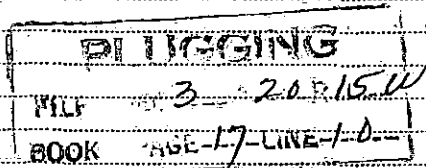

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Stanolind Oil & Gas Co.
Address. P.O. Box 591, Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.

H.G. Nething (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

P.O. Box 8, Ellinwood, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 23 day of June, 1945

My commission expires

7-28-47

Notary Public.