


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Report
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

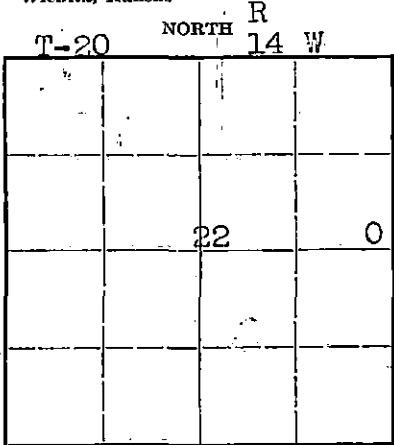

Barton County. Sec. 22 Twp. 20 Rge. (E) 14 (W) 14
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE*NE
Lease Owner. Kiowa Drilling Co., Inc.
Lease Name. V. G. Ashler Well No. _____
Office Address. 717 Union National Bank Bldg. Wichita, Kans.
Character of Well (completed as Oil, Gas or Dry Hole). Dry
Date well completed. 2-15-45 19_____
Application for plugging filed. 2-16-45 19_____
Application for plugging approved. 2-16-45 19_____
Plugging commenced. 10 AM 2-16-45 19_____
Plugging completed. 3:30 PM 2-16-45 19_____
Reason for abandonment of well or producing formation. Dry

If a producing well is abandoned, date of last production. _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes


Name of Conservation Agent who supervised plugging of this well. Kerr
Producing formation. None Depth to top. _____ Bottom. _____ Total Depth of Well. 3614 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
None				8 5/8	610	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from 3614 feet to 600 feet for each plug set.
Heavy Mud
600 x0 550 cement
550 x0 500 Heavy Mud
500 x0 465 cement
465 x0 25 Heavy Mud
25 x0 0 cement

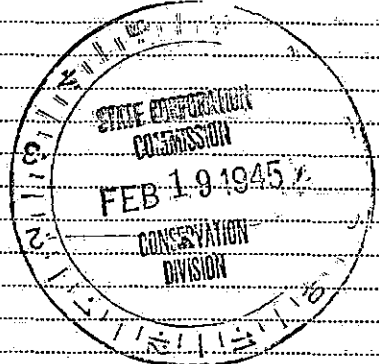

PLUGGING
WELL 22 20 14W
LOG # 5-17

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Kiowa Drilling Co.
Address 717 Union National Bank Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
_____, (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. C. Paula

(Address) _____, 1945



KIOWA DRILLING COMPANY

723 UNION NATIONAL BUILDING
WICHITA, KANSAS



DISTRICT _____ OWNER Kiowa Drilling Co. Inc. FARM Asher WELL No. 1

LOCATION: Section 22 Township 20S Range 14W County Darton State Kansas

CASING RECORD:

Size	O. D.	Weight	lbs.	Amount	ft.	Cemented	Sacks	Kind Cement
<u>8-5/8</u>				<u>610</u>		<u>300</u>		<u>Universal Portland</u>
						<u>300</u>		<u>Calcium Chloride</u>

FORMATION RECORD:

- 0 60 Surface and Sand
- 340 Sand and shale
- 510 Shale and sand
- 610 Sand, shale and shells
- 899 Sand and shale
- 1100 Shale and red bed
- 1325 Shale and shells
- 1400 Shale and salt
- 1485 Shale, shells and salt
- 1650 Sand, shale and shells
- 1835 Shale and lime
- 1960 Shale, lime and sand
- 2060 Lime and shale
- 2130 Lime
- 2570 Lime and shale
- 2630 Broken lime and shale
- 2975 Lime and shale
- 3005 Lime
- 3035 Lime and shale
- 3180 Lime
- 3288 Shale and lime
- 3300 Lime
- 3306 Lime and shale
- 3405 Lime
- 3430 Lime and shale
- 3495 Lime
- 3542 Shale
- 3566 Shale and lime
- 3617 Arbuckle T.D.

Dry and Abandoned

I hereby certify that this is a true and correct log.

Kiowa Drilling Company, Inc.

Fern A. Shyne
Vice-President

Subscribed and sworn to before me this 20th day of February, 1945.

Agnes W. [Signature]
Notary Public

My Commission expires Nov. 20, 1948

22-20-14W
5-17

22-20-14W