

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bituminous Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging oil formations.

NORTH



Locate well correctly on above
Section Flat

Barton County. Sec. 27 Twp. 20S Rge. 14 (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE $\frac{1}{4}$
Lease Owner. Phillips Petroleum Co.
Lease Name. Jettie Well No. 1
Office Address. Bartlesville, Okla.
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed. 1-28 19. 45
Application for plugging filed. 3-12 19. 45
Application for plugging approved. 3-12- 19. 45
Plugging commenced. 3-19 19. 45
Plugging completed. 3-23 19. 45
Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19. _____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. H.W. Kerr
Producing formation. Arbuckle Lime Depth to top. 3558' Bottom. _____ Total Depth of Well. 3570' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Lans. K.C.</u>	<u>Dry</u>	<u>3306' DF</u>		<u>10 3/4"</u>	<u>620.00' IT</u>	<u>None</u>
<u>Simpson Sand</u>	<u>Dry</u>	<u>3547' DF</u>		<u>5 1/2"</u>	<u>3553.29 LT</u>	<u>1858.80'</u>
<u>Arbuckle Lime</u>	<u>Water</u>	<u>3558' DF</u>				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Ran 3 sacks cement on bottom.
Filled with mud to 300', ran 15 sacks cement at 300'.
Filled with mud to 20', ran 10 sacks cement at 20' filling
to base of cellar. Plugging completed 6 PM. 3-23-45

PLUGGING
FILE - 27 20S-14W
BOOK PAGE 6 LINE 22

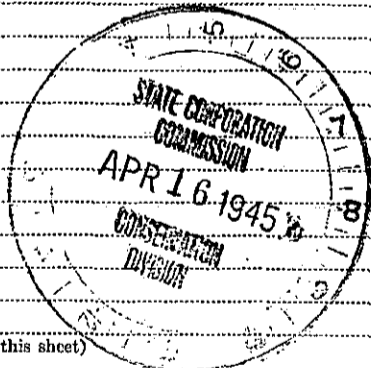

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to N.C. Mortimer
Address Box 779 Great Bend, Kans.

STATE OF Kansas, COUNTY OF Barton, ss.
N. C. Mortimer (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) N.C. Mortimer

Box 779 Great Bend, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 13th. day of April, 1945

My commission expires March 27th. 1946

J. S. Marsh
Notary Public.

Formation Record

Lease: **JETTIE**

Well No. **1**

FROM	TO	Formation	REMARKS
0	125	Earth and Sand	
125	1095	Shale and Shells	ELEVATION 1906 D.F.
1095	1304	Shale and Lime	
1304	1685	Shale and Shells	
1685	2065	Lime and Shale	
2065	2132	Shale	
2132	2182	Shale and Lime	
2182	2227	Shale	
2227	2287	Shale and Lime Shells	
2287	2360	Shale	
2360	2800	Lime and Shale	
2800	2923	Shale	
2923	2990	Shale and Lime	
2990	3221	Lime	
3221	3329	Shale and Lime	
3329	3365	Lime	
3365	3393	Shale and Lime	TOP LKC 3306
3393	3423	Lime and Chert	
3423	3449	Lime	
3449	3510	Lime	
3510	3562	Lime and Shale	TOP SIMPSON 3547'
3562	3570	Lime	TOP ARBUCKLE 3558'. Some por & sat.

