

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Rice County. Sec. 29 Twp. 20 Rge. 10 (E) (W) x
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. 330' S. of N. Line & 660' E. of
Lease Owner Anderson-Pritchard Oil Corporation W. Line of NW 1/4
Lease Name Clyde Yeo Well No. B-1
Office Address 1000 Apco Tower, Oklahoma City, Oklahoma.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed May 28, 1942 19
Application for plugging filed September 1945 19
Application for plugging approved: September 15, 1945 19
Plugging commenced Sept. 19, 1945 ~~XXXXXXXXXXXX~~ 19
Plugging completed Sept. 19, 1945 ~~XXXXXXXXXXXX~~ 19
Reason for abandonment of well or producing formation. Production Exhausted
If a producing well is abandoned, date of last production. February 1943 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes



Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well. Fuel E. Durkee, McPherson, Kansas.
Producing formation. Lime K.C. Lansing Depth to top. 3069' Bottom. 3100' Total Depth of Well. 3314' Feet
Show depth and thickness of all water, oil and gas formations. (P.B. to 3110')
OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Kansas City Lansing	Oil	3069'	3100'	8-5/8"	193'	None
				5 1/2"	3127'	1953'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Run 5 sx cement on bottom. Mudded with heavy mud to within 250' of Surface. Dumped 10 sx Cement. Mudded with heavy mud to within 15' of Surface. Dumped 5 sx cement.

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to W. J. Dearen c/o of Anderson-Pritchard Oil Corp.
Address 8th Floor, Apco Tower, Oklahoma City, Oklahoma.

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.
(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Frank O. Halloran
218 1/2 Floor Apco Tower Okla City, Okla.
(Address)
16 day of June 1947
Notary Public.

My commission expires May 22, 1951.

PLUGGING
FILE SEC 30 T 20 R 10W
BOOK PAGE 26 LINE 2

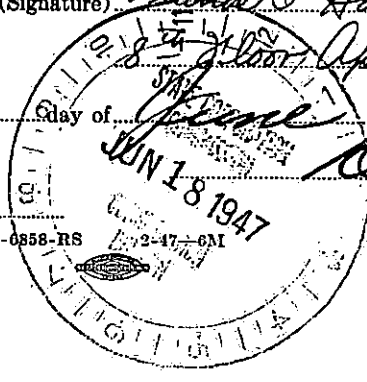

WELL RECORD:

ANDERSON-PRICHARD OIL CORPORATION, OKLAHOMA CITY, OKLAHOMA

YEO #B-1 - CNL SW/4 NE/4 Section 30-20S-10W, Rice County, Kansas

CONTRACTOR - MERCURY DRILLING COMPANY, TULSA, OKLA.

DRILLING COMMENCED - May 14, 1942

DRILLING COMPLETED - May 23, 1942

ROTARY - 0' to 3514'

P. B. to 3110'

Section 30, Township 20 South, Range 10 West, Rice County, Kansas

CASING RECORD:

Set and cemented 193' of 8-5/8" OD Pipe with 150 sacks Lone Star Cement.

Ran 3127' of 5 1/2" OD Casing and cemented with 50 sacks Cement.

FORMATION RECORD

FORMATION	TOP	BOTTOM
Water Sand	0	80
Shale	80	100
Red Bed	100	410
Anhydrite	410	435
Shale & Shells	435	910
Salt & Shale Streaks	910	1070
Salt & Shale	1070	1140
Shale & Shells	1140	1490
Shale & Lime Streaks	1490	1562
Shale & Lime	1562	1605
Sand	1605	1645
Lime & Shale	1645	1692
Broken Lime	1692	1730
Lime	1730	1845
Broken Lime	1845	1862
Lime & Shale	1862	2021
Shale & Shells	2021	2085
Sand	2085	2102
Shale & Lime	2102	2470
Broken Lime	2470	2547
Shale & Shells	2547	2580
Lime	2580	2905
Shale	2905	2980
Lime & Streaks of Shale	2980	3002
Lime	3002	3270
Shale	3270	3298
Lime	3298	3514 T.D.



We hereby certify that the above is a true and correct record of the log on the Yeo #B-1 well in the Center North Line of the Southwest quarter of the Northeast quarter of Section 30, Township 20 South, Range 10 West, Rice County, Kansas.

MERCURY DRILLING COMPANY

By *Chester H. Westfall*
CHESTER H. WESTFALL, PRESIDENT

ATTEST:
W. Cook
Asst. Secretary

PLUGGING
FILE SEC 30 T 20 R 10 W
BOOK PAGE 26 LINE 7