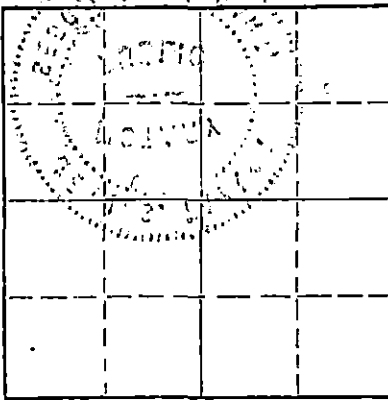


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Locate well correctly on above
Section Plat

Rice County, Sec. 19 Twp. 20S Rge. (E) 8 (W)
Location as "NE/CNW/SW" or footage from lines NW NW NW
Lease Owner Oasis Petroleum, Inc.
Lease Name Sessler Well No. 1
Office Address 800 Sutton Place, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed September 28 19 64
Application for plugging filed November 4 19 70
Application for plugging approved November 6 19 70
Plugging commenced November 23 19 70
Plugging completed November 30 19 70
Reason for abandonment of well or producing formation Well depleted

If a producing well is abandoned, date of last production November 13 19 70
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3400 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	205'	
				5 1/2"	3399'	2610'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Push plug to 3275', dumped 5 sacks cement. Worked pipe loose, pulled 81 joints 5 1/2" pipe. Howco pumped 2 sacks hulls, 20 sacks gel and 80 sacks cement. Job complete 11-30-70.

RECEIVED
STATE CORPORATION COMMISSION
DEC 4 - 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ralph Comstock Pipe Pulling, Inc.
Address 320 North Park, Stafford, Kansas 67578

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Jack G. Paulsen

(employee of owner) ~~not owner or operator~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jack G. Paulsen

800 Sutton Place, Wichita, Kansas

(Address)

Subscribed and sworn to before me this 3rd day of December, 19 70.

My commission expires June 28, 1974.

Jean S. Taylor

Notary Public.

J. S. SUTTON DRILLING CO.
515 ORPHEUM BUILDING
WICHITA, KANSAS

#1 Sessler - O. A. Sutton
NW NW NW Sec. 19-20S-8W
Rice County, Kansas

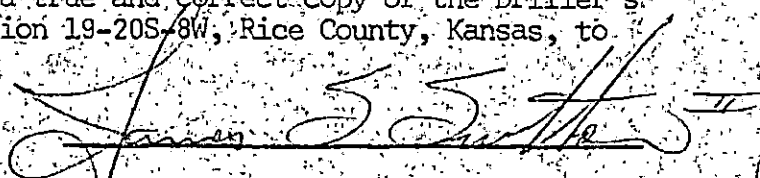
Date Commenced - 9/21/64
Date Completed - 9/28/64
Elevation - 1673 K. B.

0-	205	Sand, Shale w/ Lime Streaks	Ran 6 jts. 8-5/8" csg to
205-	630	Shale	205" w/300 sx HA5 Pozmix
630-	1150	Shale	
1150-	1274	Lime & Shale	
1274-	1544	Lime & Shale	
1544-	1835	Lime & Shale	
1835-	2230	Shale & Lime	
2230-	2375	Lime & Shale	
2375-	2565	Lime & Shale	
2565-	2730	Lime & Shale	
2730-	2908	Lime & Shale	
2908-	3045	Kansas City	
3045-	3135	Kansas City	
3135-	3212	Kansas City	
3212-	3224	Shale	
3224-	3293	Lime & Shale	
3293-	3400	Lime & Shale	
3400-		Total Depth	Ran 106 jts. 5-1/2" csg, w/60 sx Pozmix

RECEIVED
STATE CORPORATION COMMISSION
NOV 6 1970
CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
) ss.
COUNTY OF SEDGWICK)

I, JAMES S. SUTTON, II, certify that this is a true and correct copy of the Driller's Log for the well drilled in the NW NW NW Section 19-20S-8W, Rice County, Kansas, to the best of my knowledge and belief.


JAMES S. SUTTON, II

Before me, the undersigned, a Notary Public, within and for said county and state, on this 1st day of October, 1964, personally appeared James S. Sutton, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed and for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


Lois J. McCoy, Notary Public

My Commission Expires January 8, 1968