


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

Pawnee County, Sec. 35 Twp. 20 Rge. 16W(E) (W)
Location as "NE/CNW/SW" or footage from lines. NE-NE SE
Lease Owner Tenneco Oil Co.
Lease Name P.C. Schultz #1-35 Well No. _____
Office Address 2000 Classen Center, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 12-06-71 19____
Application for plugging filed 7-26-73 19____
Application for plugging approved 7-31-73 19____
Plugging commenced 9/5/73 19____
Plugging completed 9/11/73 19____
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production February 19 73
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

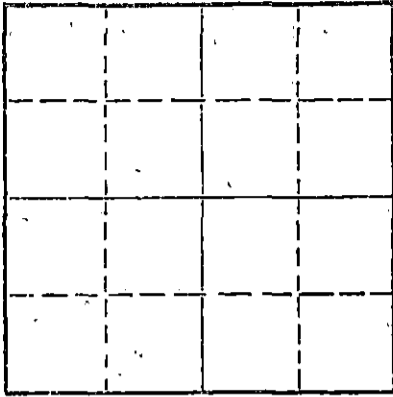

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Arbuckle Depth to top 3787 Bottom --- Total Depth of Well 3870 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface csg	0	1047	8-5/8	1047	none
	Prod'n csg	3309	3869	5 1/2	3869	2709

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3854', ran sand to 3750' and ran 5 sacks cement. Dug cellar, surface pipe was making water. Rigged up, took head apart, and put on stripper head. Worked pipe to 20" tension, shot pipe at 2792', left set on tension. Checked hole to 2750', shot pipe at 2700', pulled 83 joints. Took off stripper head and tallied pipe. Set 15' rock bridge at 365' and ran 5 yards ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
SEP 26 1973
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASTING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOELJ. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of September, 19 73

My commission expires

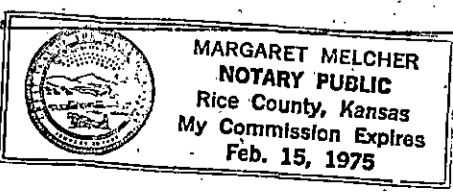

Margaret Melcher
Notary Public.