


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

NORTH

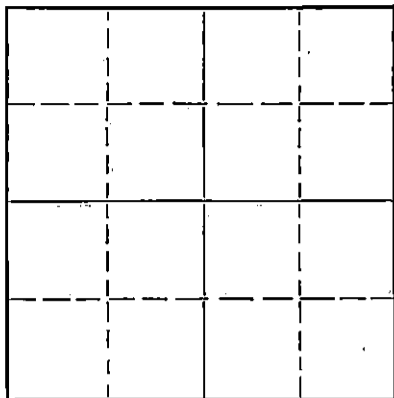

Locate well correctly on above  
Section Plat

Rice County, Sec. 11 Twp. 20S Rge. 18(W)  
Location as "NE/CNW/SW" or footage from lines S/2 S/2 NW/4  
Lease Owner Smitherman & Cohen Drilling Company  
Lease Name Stahl Well No. 1  
Office Address P. O. Box 692 El Dorado, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 8 - 3 19 49  
Application for plugging filed 4 - 10 19 52  
Application for plugging approved 4 - 17 19 52  
Plugging commenced 5 - 19 19 52  
Plugging completed 5 - 27 19 52  
Reason for abandonment of well or producing formation Oil depleted

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruell Durkee  
Producing formation Depth to top Bottom Total Depth of Well 3313 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				5 1/2"		2102'
				8 5/8"	118'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole from 3330' to 3300' and ran 6 sacks of cement. Mudded hole to 117' and pumped in 25 sacks of cement. Bailed hole and mudded hole to 40'. Ran 10 sacks of cement on top. Plugging completed.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor West Supply Company  
Address Chase, Kansas


STATE OF Kansas, COUNTY OF Butler, ss.  
I, C. Smitherman, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. SMITHERMAN & COHEN DRILLING COMPANY

(Signature) *[Signature]*  
P. O. Box 692 El Dorado, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 2nd day of June, 19 52

My commission expires March 3, 1955

*[Signature]*  
Notary Public.



23-8390-s ST/8-51-20 CORPORATION COMMISSION

RECEIVED

JUN 3 - 1952 6-3-52

CONSERVATION DIVISION  
Wichita, Kansas

## STAHL WELL #1

8 5/8" @ 148 - 100 sx

5 1/2" @ 3315 - 100 sx

Allan & Brooks  
S 1/2 S 1/2 NW 14-20-8WComm: 7/14/49 Compl: 8/3/49  
Contractor: Tom Allan  
Elevation: 1644  
I.P. Flow 84 bbl. oil 1st day

0 -	10	Soil
	50	Sand
	65	Gravel
	174	Red Beds
	182	Anhydrite
	500	Red Beds
	800	Shale
	1000	Salt & Shale
	1250	Shale & Shells
	1330	Lime
	1358	Shale
	1376	Fossiliferous Cherty Lime
	2332	Shale & Shells
	2348	Sandstone
	2370	Shale
	2380	Lime
	2670	Lime & Shale
	2674	Black Shale
	2799	Shale
	2804	Brown Lime
	2831	Shale
	3110	Lime & Shale Breaks
	3202	Shale
	3235	Red Shale & Little Colored Chert.
	3313	Red and Gray Shale
	3325	Sand
	3330	Gray Shale

## FORMATION:

174	Top Anhydrite
1250	Top Fort Riley
1358	Top Florence Flint
2370	Top Topeka
2799	Top Iatan
2831	Top Lansing
3202	Top Conglomerate
3313	Top Misener

