

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Barton County. Sec. 18 Twp. 20 Rge. 13 X (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE SW

Lease Owner The Phil-Han Oil Company

Lease Name Harrison Well No. 1

Office Address Union National Bank Bldg, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed October 2, 1947 19

Application for plugging filed " 19

Application for plugging approved " 19

Plugging commenced " 19

Plugging completed " 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Durkee

Producing formation Depth to top Bottom Total Depth of Well 3555 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	340'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to bottom of surface pipe, pushed bottom plug to 325' and cemented with 15 sacks. Pushed top plug to 35', cemented with 10 sacks.

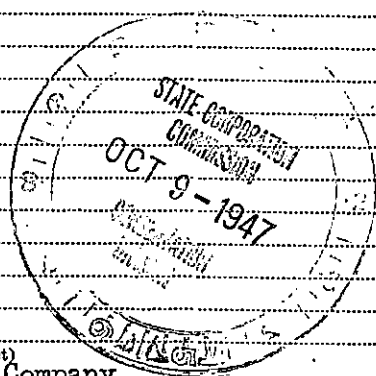

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Phil-Han Oil Company
Address Union National Bank Bldg., Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, SS.

Perry R. Hanson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Perry R. Hanson

SUBSCRIBED AND SWORN to before me this 8th day of October, 1947

My commission expires October 4, 1949. Notary Public.



#1 HARRISON
The Phil-Han Oil Company

NE NE SW Section 18-20-13W
Barton County, Kansas

Comm: 9-19-47
Comp: 10-2-47

Elevation - 1881'

soil	10
sand	180
shale & shells	325
red rock	785
anhydrite	810
shale & shells	1200
salt	1300
salt, shale & shells	1550
shale & lime	1585
lime	1720
lime, rough	1810
lime	2050
lime & shale	2165
lime	2230
lime, shale & shells	2365
lime & shale	2470
broken lime	2585
shale & lime	2730
shale & shells	2835
shale & lime	2925
lime	3130
shale & lime	3215
lime	3480
lime, cong. & sand	3510
Arbuckle lime & chert	3545
lime	3555

1881
810
1071

T.D.

CASING RECORD:

8 5/8" surface casing at 335' set
w/225 sacks of bulk cement.

STATE OF KANSAS)
) SS
SEDGWICK COUNTY)

We hereby affirm that the above and foregoing is a true and correct copy of the log of our #1 Harrison, located in the NE NE SW Section 18-20-13W, Barton County, Kansas.

THE PHIL-HAN OIL COMPANY

By Wm. P. Hanson

Subscribed and sworn to before me, this 8th day of October, 1947.

Allen A. Steinberg
Notary public.

My com. expires Oct. 4, 1949.



PLUGGING
FILE SEC 18 T 20 R 13W
BOOK PAGE 138 LINE 3