


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

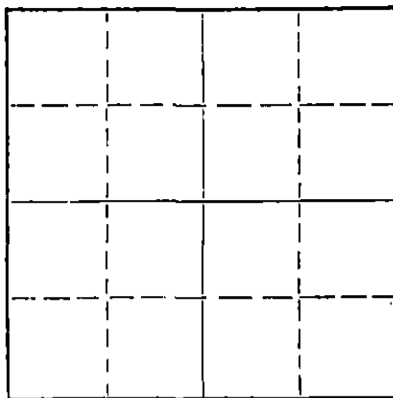

Locate well correctly on above
Section Plat

Pawnee County, Sec. 36 Twp. 20S Rge. 16W (E) (W)
Location as "NE/CNW%SW%" or footage from lines 1320' ENL & 900' FWL SW/4
Lease Owner: Alpine Drilling Co., Inc.
Lease Name: P. C. Schultz Well No. 2
Office Address: 800 Biting Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed May 14, 1971 19
Application for plugging filed May 14, 1971 (by phone) 19
Application for plugging approved May 14, 1971 (by phone) 19
Plugging commenced May 14, 1971 19
Plugging completed May 14, 1971 19
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3785 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1034 ft.	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set bottom plug at 360 feet, 25 sacks cement, filled to 40 feet. Plug and 1/2 sack hulls and 10 sacks cement to bottom of cellar. 2 sacks cement in rat hole.


RECEIVED
STATE CORPORATION COMMISSION
MAY 24 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor: Gabbert-Jones, Inc.
Address: 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF Sedgwick, ss.
Jon T. Williams, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Jon T. Williams, Jr.
800 Biting Bldg., Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 21 day of May, 19 71
Evelyn Wanko
Notary Public.



GABBERT JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

P. C. SCHULTZ #2
1320' FNL & 990' FWL SW/4 Sec. 36-20S-16W
Pawnee County, Kansas

Commenced: May 6, 1971
Completed: May 14, 1971

OPERATOR: Alpine Drilling Co. Inc.

RECEIVED
STATE CORPORATION COMMISSION
MAY 24 1971
CONSERVATION DIVISION
Wichita, Kansas

DEPTH		FORMATION	REMARKS
From	To		
0	455	Sand and Shale	Ran 26 joints of used 8 5/8" casing 28#
455	568	Dakota Sand	Set @ 1034 w/400 sks 60/40 Posmix
568	580	Shale	w/3% CC & 2% Gel
580	1024	Red bed and Shale	PD @ 5:30 PM 5/7/71
1024	1053	Anhydrite	Cement Circ. Centralizer 5' below collar
1053	1425	Shale	on shoe joint
1425	1967	Shale and Shells	Centralizer @ 450' & 575'
1967	2280	Lime and Shale	
2280	2470	Lime	
2470	2910	Shale and Lime	
2910	3245	Lime	
3245	3450	Lime and Shale	
3450	3785	Lime	
3785	TD	D&A	


I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled in the SW/4 of Section 36-20S-16W, Pawnee County, Kansas to the best of my knowledge and belief.

James S. Sutton II
James S. Sutton, II

STATE OF KANSAS)
)
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 20th day of May, 1971, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I Have hereunto set my hand and official seal the day and year last above written.



Marjorie Hall
Marjorie Hall, Notary Public

My commission expires Nov. 29, 1971